



Lexmark™

Lexmark MX931dse

Powerful, large-format addition to your printer fleet



Lexmark MX931dse

The Lexmark MX931dse large-format mono multifunction is designed for security, versatility and performance for large workgroups at speeds up to 35 pages per minute*. Two-sided scanning and a 17.78 cm tablet-like touchscreen make handling your scan and print jobs easy.



Productivity is in the box

- ▶ It includes workflow solutions like Scan Centre for simple document routing, Optical Character Recognition (OCR), and the Intelligent Storage Drive (ISD) for solid state storage with activation-ready preloaded add-on solutions.
- ▶ A large, button-free touchscreen helps users intuitively complete every task, from the basic to the complex.
- ▶ Replacement cartridges yield up to 37,000 pages**.

Flexible input and output

- ▶ Print and scan paper sizes up to A3 (297 x 420 mm).
- ▶ Standard input capacity is 620 pages. Optional trays expand the paper input capacity up to 5,140 pages.

- ▶ Finishing options include a staple finisher and a staple hole punch finisher.

Secure by design

- ▶ Lexmark security features help keep your information safe - in the document, on the device, over the network and at all points in between.
- ▶ Always improving security, we now include a standard Trusted Platform Module***, which delivers authentication, system integrity checks, and cryptographic capabilities to create a unique digital system fingerprint.

Always focused on sustainability

- ▶ MX931dse is designed for the circular economy.
- ▶ Automatic two-sided printing is standard, along with built-in energy-saving modes that help support ratings of EPEAT® Silver and ENERGY STAR® certified.

Power up with IoT

- ▶ Our sophisticated, IoT-enabled printers are loaded with sensors that continuously monitor hundreds of data points.
- ▶ When you connect your device to Lexmark Cloud Services, you can optimise performance and uptime with additional features like predictive service and automatic supplies replenishment.


This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

* Print speeds measured in accordance with ISO/IEC 24734 (ESAT). For more information see: www.lexmark.com/ISOspeeds.

** Average continuous mono declared yield in one-sided (simplex) mode up to this number of pages in accordance with ISO/IEC 19752. Actual yield will vary considerably based upon many factors. See www.lexmark.com/yields for more information.

*** The Trusted Platform Module (TPM) is not available in some countries.

Lexmark MX931dse

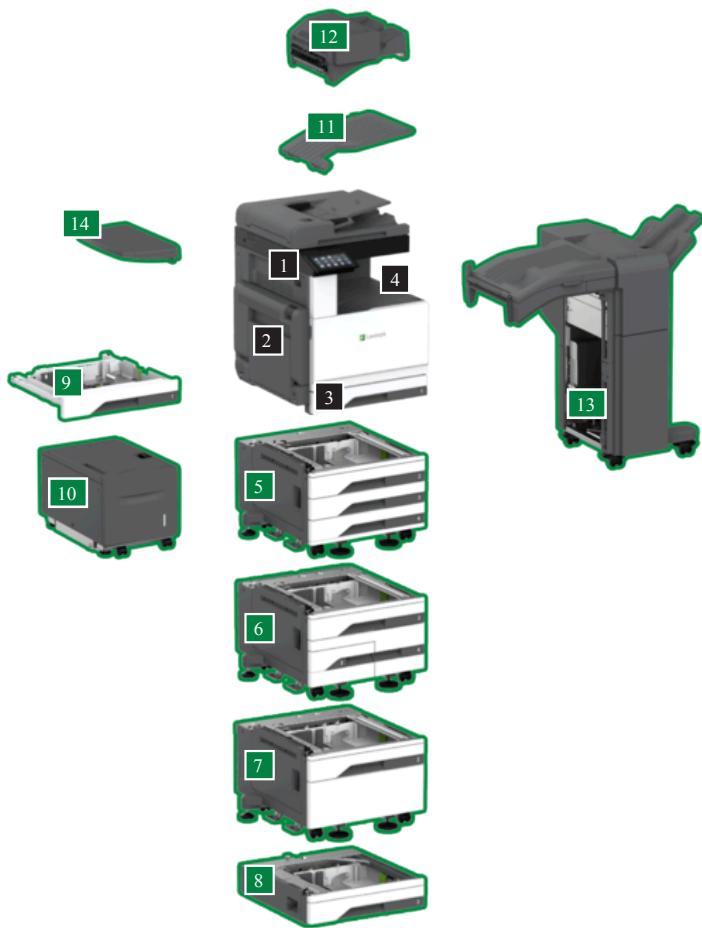

| | | | |
|---|---|----|--|
| 1 | Multifunction product with 17.8 cm touch screen 767.9 x 590 x 699.3 mm | 9 | CX93x/MX93x Envelope Tray 160 x 684 x 664 mm |
| 2 | 100-Sheet multipurpose feeder Dimensions included as part of base model | 10 | 2000-Sheet Tray 491 x 751 x 526 mm |
| 3 | 520-Sheet tray Dimensions included as part of base model | 11 | Dual Catch Bin 123 x 447 x 378 mm |
| 4 | 400-Sheet output bin Dimensions included as part of base model | 12 | 500-Sheet Staple Offset Finisher 238 x 478 x 460.5 mm |
| 5 | 3 x 520-Sheet Tray with Caster 381.6 x 615.7 x 620 mm | 13 | 2000-Sheet Staple 2/3 Hole Punch Finisher 983 x 962 x 653 mm |
| 6 | 2520-Sheet Tandem Tray with Caster 381.6 x 615.7 x 620 mm | 14 | Work Table 58 x 301 x 486 mm |
| 7 | 520-Sheet Tray with Caster Cabinet 381.6 x 615.7 x 620 mm, 381.6 x 615.7 x 620 mm | | |
| 8 | 520 Sheet Tray 133.5 x 540 x 586 mm | | |



Standard
Optional

| | |
|------------|--|
| P/N | Hardware 32D0064 Lexmark MX931dse |
| P/N | Supplies 63D0H00 Lexmark MX931 Black 37K Toner Cartridge 63D0Z00 Lexmark MX931 Black 81.5K Imaging Unit |
| P/N | Paper Handling 32D0800 CX93x, MX93x 520-Sheet Tray 32D0801 CX93x, MX93x 520-Sheet Tray with Caster Cabinet 32D0802 CX93x, MX93x 3 x 520-Sheet Tray with Caster 32D0803 CX93x/MX93x 2520-Sheet Tandem Tray with Caster 32D0804 CX93x/MX93x Envelope Tray 32D0816 CX93x/MX93x/CS94x/CX94x 2000-Sheet Tray 32D0818 CX93x/MX93x Dual Catch Bin 32D0820 CX93x/MX93x/CS94x/CX94x 500-Sheet Staple Offset Finisher 32D0821 CX93x/MX93x 2000-Sheet Staple 2/3 Hole Punch Finisher 32D0822 CX93x/MX93x 2000-Sheet Staple 2/4 Hole Punch Finisher |
| P/N | Memory Options 27X0400 500+ GB Hard Disk |
| P/N | Application Solutions 57X0300 Contact Authentication Device 57X0301 Contactless Authentication Device 82S1203 IPDS License 82S1204 Bar Code License |
| P/N | Connectivity 1021294 USB (2 Meter) Cable 27X6410 Lexmark MarkNet N8372 802.11 a/b/g/n/ac Wireless Print Server 37X6350 Analog Fax Card 57X7040 English Keyboard Kit |
| P/N | Furniture 32D0808 CX93x/MX93x Work Table |

You can install one of the following: the Dual Catch Bin or the Inline Staple Finisher or the Staple Hole Punch Finisher. To install the Staple Hole Punch Finisher, you must also install the 520-Sheet Tray with Caster Cabinet, the 3x520-Sheet Tray with Casters, or the 2,520-Sheet Tandem Tray with Casters. To install the 2,000-Sheet Tray (sidecar), you must also install the 3x520-Sheet Tray with Casters or the 2,520-Sheet Tandem Tray with Casters. It will not work with the 520-Sheet Tray with Caster Cabinet. To install the Envelope Tray, you must remove Tray 1 and replace it with the Envelope Tray.

| Product Specifications | | Lexmark MX931dse |
|---|--|------------------|
| Printing | | |
| Display | Lexmark e-Task 7-inch (17.8 cm) colour touch screen | |
| Print Speed | Up to: Black: 35 ppm ¹ (A4) | |
| Time to First Page | As fast as: Black: 4.5 seconds | |
| Print Resolution | Black: 1200 x 1200 dpi, 600 x 600 dpi, 1200 IQ (1200 x 600 dpi) | |
| Memory | Standard: 4096 MB / Maximum: 4096 MB | |
| Hard Disk | Intelligent Storage Drive included; Magnetic Hard Disk (optional) | |
| Recommended Monthly Page Volume | 4,000 - 20,000 pages ² | |
| Maximum Monthly Duty Cycle | Up to: 150 000 pages per month ³ | |
| Copying | | |
| Copy Speed | Up to: Black: 35 cpm ¹ (A4) | |
| Time to First Copy | as fast as: Black: 6.4 seconds | |
| Scanning | | |
| Scanner Type / ADF Scan | Flatbed scanner with automatic document feeder / RADF (reversing Duplex) | |
| A4/Ltr Duplex Scan Speed | Up to: Black: 27.5/27.5 sides per minute / Colour: 27.5/27.5 sides per minute | |
| A4/Ltr Simplex Scan Speed | Up to: Black: 55/55 sides per minute / Colour: 55/55 sides per minute | |
| ADF Paper Input Capacity | Up to: 110 pages 75 gsm bond | |
| Supplies⁴ | | |
| Laser Cartridge Yields | up to: 37,000 ⁵ 5-page Black Cartridge | |
| Imaging Unit Estimated Yield | Up to: 81,500 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage | |
| Cartridge(s) Shipping with Product | 18,500 ⁵ 5-page Black Toner Cartridge ⁵ | |
| Paper Handling | | |
| Included Paper Handling | 100-Sheet Multipurpose Feeder, 400-Sheet Output Bin, 520-Sheet Tray | |
| Optional Paper Handling | 520-Sheet Tray/Caster Cabinet, 520-Sheet Tray, Inline Stapler, Dual Catch Bin, Envelope Tray, 3 x 520-Sheet Tray/Caster, Staple Punch Finisher, 2520-Sheet Tandem Tray/Caster, Work table, 2000-Sheet Tray | |
| Paper Input Capacity | Up to: Standard: 620 pages 75 gsm bond / Maximum: 5140 pages 75 gsm bond | |
| Paper Output Capacity | Up to: Standard: 400 pages 75 gsm bond / Maximum: 2000 pages 75 gsm bond | |
| Media Types Supported | Labels, Card Stock, Plain Paper, Envelopes, Glossy paper, Refer to the Paper & Specialty Media Guide | |
| Media Sizes Supported | A6, Oficio, 7 3/4 Envelope, JIS-B4, 9 Envelope, JIS-B5, A3, Ledger, A4, Legal, A5, Hagaki Card, Letter, B5 Envelope, C4 Envelope, Statement, C5 Envelope, Executive, DL Envelope, Folio, 10 Envelope | |
| General Information | | |
| Standard Ports | Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear USB 2.0 Specification Hi-Speed Certified port (Type A), USB 2.0 Specification Hi-Speed Certified (Type B) | |
| Optional Network Ports | Marknet N8372 WiFi Option | |
| Noise Level | Operating: 51 dBA (Print) / 56 dBA (Copy) / 55 dBA (Scan) | |
| Specified Operating Environment | Humidity: 8 to 80% Relative Humidity / Altitude: 0 - 2500 metres / Temperature: 10 to 32°C (50 to 90°F) | |
| Product Warranty | 1-Year Onsite Repair, Next Business Day | |
| Size / Weight | H x W x D: 767.9 x 590 x 699.3 mm / 53 kg | |
| ENERGY STAR Typical Electricity Consumption | TEC: 0.52 kilowatt-hours per week | |

All information is subject to change without notice. Lexmark is not liable for any errors or omissions.

¹ Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds.

² "Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³ "Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴ Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. ⁵ Average standard page yield value declared in accordance with ISO/IEC 19752.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

© 2022 Lexmark. All rights reserved.

Lexmark and the Lexmark logo are trademarks of Lexmark International, Inc., registered in the United States and/or other countries.

Apple and AirPrint are trademarks of Apple Inc., registered in the U.S. and other countries and regions. MOPRIA[®], the Mopria[®] Logo, and the Mopria Alliance[™] word mark and logo are registered and/or unregistered trademarks and service marks of Mopria Alliance, Inc. in the United States and other countries. Unauthorised use is strictly prohibited. ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the U.S. Environmental Protection Agency. EPEAT is a trademark of the Green Electronics Council in the United States and other countries. PANTONE[®] is the property of Pantone LLC. All other trademarks are the property of their respective owners.

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (<http://www.openssl.org/>).



lexmark.com