



---

## Lexmark CX931dtse


Space-saving design and large-format flexibility

---





# Lexmark CX931dtse

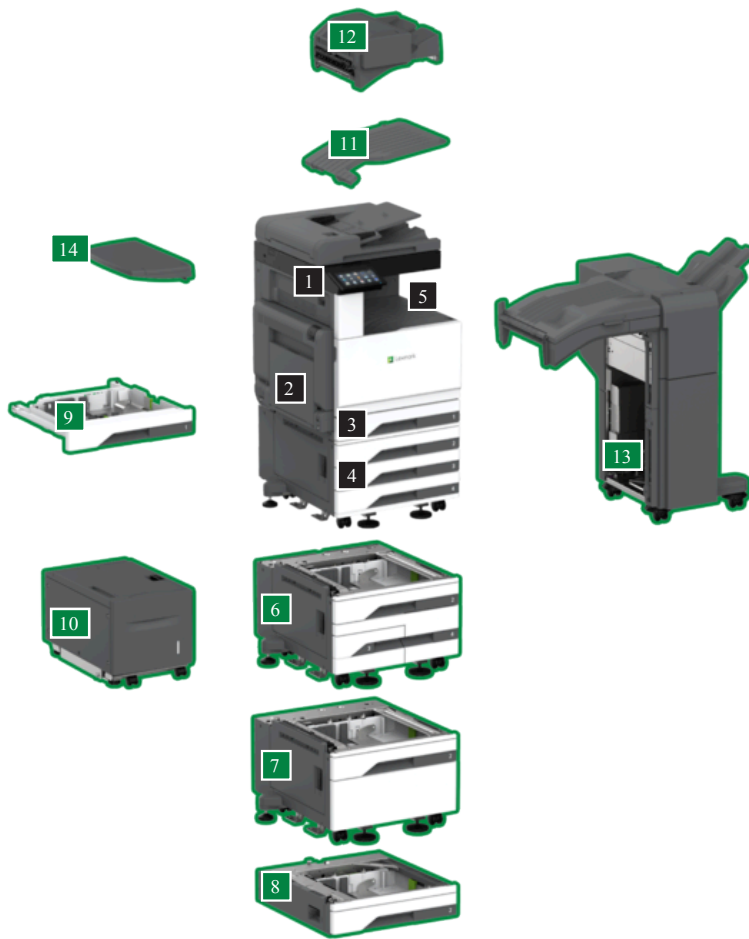

- 1 **Multifunction product with 7-inch (17.8 cm) touch screen**  
1119 x 590 x 699.3 mm  
44.1 x 23.2 x 27.5 in.
- 2 **100-Sheet multipurpose feeder**  
Dimensions included as part of base model
- 3 **520-Sheet tray**  
Dimensions included as part of base model
- 4 **3 x 520-Sheet tray with casters**  
Dimensions included as part of base model
- 5 **400-Sheet output bin**  
Dimensions included as part of base model
- 6 **2,520-Sheet Tandem Tray with Caster**  
381.6 x 615.7 x 620 mm  
15 x 24.2 x 24.4 in.
- 7 **520-Sheet Tray with Caster Cabinet**  
381.6 x 615.7 x 620 mm, 381.6 x 615.7 x 620 mm  
15 x 24.2 x 24.4 in., 15 x 24.2 x 24.4 in.
- 8 **520 Sheet Tray**  
133.5 x 540 x 586 mm  
5.3 x 21.3 x 23.1 in.

- 9 **Envelope Tray**  
160 x 684 x 664 mm  
3.4 x 26.9 x 26.1 in.
- 10 **2,000-Sheet Tray (sidecar)**  
491 x 751 x 526 mm  
19.3 x 29.6 x 20.7 in.
- 11 **Dual Catch Bin**  
123 x 447 x 378 mm  
4.8 x 17.6 x 14.9 in.
- 12 **Inline Staple Finisher**  
238 x 478 x 460.5 mm  
9.4 x 18.8 x 18.1 in.
- 13 **Staple (2/3) Hole Punch Finisher**  
983 x 962 x 653 mm  
38.7 x 37.9 x 25.7 in.
- 14 **Work Table**  
58 x 301 x 486 mm  
2.3 x 11.9 x 19.1 in.



|            |  |
|------------|--|
| <b>P/N</b> | <b>Hardware</b>  |
| 32D0250    | Lexmark CX931dtse  |
| <b>P/N</b> | <b>Supplies</b>  |
| 85D00C0    | Lexmark CX930, 931 Cyan 5K Toner Cartridge                     |
| 85D00K0    | Lexmark CX930, 931 Black 5K Toner Cartridge                    |
| 85D00M0    | Lexmark CX930, 931 Magenta 5K Toner Cartridge                  |
| 85D00Y0    | Lexmark CX930, 931 Yellow 5K Toner Cartridge                   |
| 85D0HC0    | Lexmark CX930, 931 Cyan 16.5K Toner Cartridge                  |
| 85D0HK0    | Lexmark CX930, 931 Black 28K Toner Cartridge                   |
| 85D0HM0    | Lexmark CX930, 931 Magenta 16.5K Toner Cartridge               |
| 85D0HY0    | Lexmark CX930, 931 Yellow 16.5K Toner Cartridge                |
| 85D0P00    | Lexmark CX930, 931, XC9325, 9335 Black 87K Photoconductor      |
| 85D0Q00    | Lexmark CX930, 931, XC9325, 9335 3-Pack 87K Photoconductor Kit |
| 85D0W00    | Lexmark CX930, 931, XC9325, 9335 40K Waste Container           |

|            |                                      |
|------------|--------------------------------------|
| <b>P/N</b> | <b>Paper Handling</b>                |
| 32D0800    | 520-Sheet Tray                       |
| 32D0801    | 520-Sheet Tray with Caster Cabinet   |
| 32D0802    | 3 x 520-Sheet Tray with Casters      |
| 32D0803    | 2,520-Sheet Tandem Tray with Casters |
| 32D0804    | Envelope Tray                        |
| 32D0816    | 2,000-Sheet Tray (sidecar)           |
| 32D0818    | Dual Catch Bin                       |
| 32D0820    | Inline Staple Finisher               |
| 32D0821    | Staple (2/3) Hole Punch Finisher     |
| 32D0822    | Staple (2/4) Hole Punch Finisher     |

|            |                       |
|------------|-----------------------|
| <b>P/N</b> | <b>Memory Options</b> |
| 27X0400    | 500+ GB Hard Disk     |

|            |                                   |
|------------|-----------------------------------|
| <b>P/N</b> | <b>Application Solutions</b>      |
| 57X0300    | Contact Authentication Device     |
| 57X0301    | Contactless Authentication Device |
| 82S1203    | IPDS License                      |
| 82S1204    | Bar Code License                  |

|            |   |
|------------|---|
| <b>P/N</b> | <b>Connectivity</b>   |
| 1021294    | USB (2 Meter) Cable   |
| 27X6410    | Lexmark MarkNet N8372 802.11 a/b/g/n/ac Wireless Print Server |
| 37X6350    | Analog Fax Card   |
| 57X7040    | English Keyboard Kit  |
| SPD0001    | Surge Protective Device, 110-120V                             |

|            |                        |
|------------|------------------------|
| <b>P/N</b> | <b>Furniture</b>       |
| 32D0808    | CX93x/MX93x Work Table |

You can install one of the following: the Dual Catch Bin or the Inline Staple Finisher or the Staple Hole Punch Finisher. To install the Staple Hole Punch Finisher, you must also install the 520-Sheet Tray with Caster Cabinet, the 3x520-Sheet Tray with Casters, or the 2,520-Sheet Tandem Tray with Casters. To install the 2,000-Sheet Tray (sidecar), you must also install the 3x520-Sheet Tray with Casters or the 2,520-Sheet Tandem Tray with Casters. It will not work with the 520-Sheet Tray with Caster Cabinet. To install the Envelope Tray, you must remove Tray 1 and replace it with the Envelope Tray.

| Product Specifications                      |  | Lexmark CX931dtse |
|---|--|-------------------|
| <b>Printing</b>                             |  |                   |
| Display                                     | Lexmark e-Task 7-inch (17.8 cm) colour touch screen  |                   |
| Print Speed                                 | Up to: Black: 35 ppm <sup>1</sup> (Letter) / Colour: 35 ppm <sup>1</sup> (Letter)  |                   |
| Time to First Page                          | as fast as: Black: 7.2 seconds / Colour: 6.2 seconds   |                   |
| Print Resolution                            | Black: 1200 x 1200 dpi, 2400 IQ (2400 x 600 dpi) / Colour: 1200 x 1200 dpi, 2400 IQ (2400 x 600 dpi)   |                   |
| Memory                                      | Standard: 4096 MB / Maximum: 4096 MB   |                   |
| Hard Disk                                   | Intelligent Storage Drive included; Magnetic Hard Disk (optional)  |                   |
| Recommended Monthly Page Volume             | 4,000 - 20,000 pages <sup>2</sup>  |                   |
| Maximum Monthly Duty Cycle                  | Up to: 150 000 pages per month <sup>3</sup>  |                   |
| <b>Copying</b>                              |  |                   |
| Copy Speed                                  | Up to: Black: 35 cpm <sup>1</sup> (Letter) / Colour: 35 cpm <sup>1</sup> (Letter)  |                   |
| Time to First Copy                          | as fast as: Black: 9.1 seconds / Colour: 8 seconds   |                   |
| <b>Scanning</b>                             |  |                   |
| Scanner Type / ADF Scan                     | Flatbed scanner with automatic document feeder / RADF (reversing Duplex)   |                   |
| A4/Ltr Duplex Scan Speed                    | Up to: Black: 27.5/27.5 sides per minute / Colour: 27.5/27.5 sides per minute  |                   |
| A4/Ltr Simplex Scan Speed                   | Up to: Black: 55/55 sides per minute / Colour: 55/55 sides per minute  |                   |
| ADF Paper Input Capacity                    | Up to: 110 pages 20 lb or 75 gsm bond  |                   |
| <b>Supplies<sup>4</sup></b>                 |  |                   |
| Laser Cartridge Yields                      | up to: 16,500 <sup>5</sup> -page Colour (CMY) Cartridges / up to: 28,000 <sup>5</sup> -page Black Cartridge  |                   |
| Cartridge(s) Shipping with Product          | 5,000 <sup>5</sup> -page Black and Colour (CMYK) Toner Cartridges <sup>5</sup>   |                   |
| <b>Paper Handling</b>                       |  |                   |
| Included Paper Handling                     | 100-Sheet Multipurpose Feeder, 400-Sheet Output Bin, 520-Sheet Tray, 3 x 520-Sheet Tray/Caster   |                   |
| Optional Paper Handling                     | 520-Sheet Tray/Caster Cabinet, 520-Sheet Tray, Inline Stapler, Dual Catch Bin, Envelope Tray, Staple Punch Finisher, 2520-Sheet Tandem Tray/Caster, Work table, 2000-Sheet Tray                              |                   |
| Paper Input Capacity                        | Up to: Standard: 2180 pages 20 lb or 75 gsm bond / Maximum: 4180 pages 20 lb or 75 gsm bond  |                   |
| Paper Output Capacity                       | Up to: Standard: 400 pages 20 lb or 75 gsm bond / Maximum: 2000 pages 20 lb or 75 gsm bond   |                   |
| Media Types Supported                       | Labels, Card Stock, Plain Paper, Envelopes, Glossy paper, Refer to the Paper & Specialty Media Guide   |                   |
| Media Sizes Supported                       | A6, Oficio, 7 3/4 Envelope, JIS-B4, 9 Envelope, JIS-B5, A3, Ledger, A4, Legal, A5, Hagaki Card, Letter, B5 Envelope, C4 Envelope, Statement, C5 Envelope, Executive, DL Envelope, Folio, 10 Envelope         |                   |
| <b>General Information</b>                  |  |                   |
| Standard Ports                              | Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear USB 2.0 Specification Hi-Speed Certified port (Type A), USB 2.0 Specification Hi-Speed Certified (Type B) |                   |
| Optional Network Ports                      | Marknet N8372 WiFi Option  |                   |
| Noise Level                                 | Operating: 50 dBA (Print) / 55 dBA (Copy) / 55 dBA (Scan)  |                   |
| Specified Operating Environment             | Humidity: 8 to 80% Relative Humidity / Altitude: 0 - 2500 Meters (8,200 Feet) / Temperature: 10 to 32°C (50 to 90°F)   |                   |
| Limited Warranty                            | See Statement of Limited Warranty: 1-Year Onsite Repair, Next Business Day   |                   |
| Size / Weight                               | H x W x D: 1119 x 590 x 699.3 mm / 96.9 kg   |                   |
| ENERGY STAR Typical Electricity Consumption | TEC: 0.53 kilowatt-hours per week  |                   |

All information is subject to change without notice. Lexmark is not liable for any errors or omissions.

<sup>1</sup> Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: [www.lexmark.com/ISOspeeds](http://www.lexmark.com/ISOspeeds).

<sup>2</sup> "Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. <sup>3</sup> "Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. <sup>4</sup> Product functions only with replacement cartridges designed for use in a specific geographical region. See [www.lexmark.com/regions](http://www.lexmark.com/regions) for more details. <sup>5</sup> Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

© 2022 Lexmark. All rights reserved.

Lexmark and the Lexmark logo are trademarks of Lexmark International, Inc., registered in the United States and/or other countries.

Apple and AirPrint are trademarks of Apple Inc., registered in the U.S. and other countries and regions. MOPRIA®, the Mopria® Logo, and the Mopria Alliance™ word mark and logo are registered and/or unregistered trademarks and service marks of Mopria Alliance, Inc. in the United States and other countries. Unauthorized use is strictly prohibited. ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the U.S. Environmental Protection Agency. EPEAT is a trademark of the Green Electronics Council in the United States and other countries. PANTONE® is the property of Pantone LLC. All other trademarks are the property of their respective owners.

This product includes software developed by the OpenSSL Project for use in the Open SSL Toolkit (<http://www.openssl.org/>).

