



## Lexmark C2335

Exceptional performance, secure and sustainable



# Lexmark C2335

With exceptional performance and secure design, the C2335 printer delivers enhanced productivity, up to 35 ppm\* on letter paper and toner yields up to 20,000 pages mono\*\*, and up to 11,700 pages color\*\*. Engineered for long life with environmental certifications and advanced power management, this efficient model has high sustainability. Fast time to first print, superior print quality and easy-to-use touch screen.

## Secure by design

Lexmark expertise helps customers protect their data, their device and their network. Our security ecosystem is designed to overcome the most complex data challenges. And now we've added the Trusted Platform Module (TPM)\*\*\*, which includes on-board authentication, system integrity checks, and cryptographic capabilities to create a unique digital system fingerprint. TPM meets stringent industry and US government security standards including Common Criteria and Federal Information Processing Standard (FIPS).

## Proprietary technology

We own core technology across hardware, firmware, services, and solutions, creating seamless connections designed to reduce the risk of security gaps between your document, your device and your network. Our expertise is our customer's benefit.

## Sustainability

With certifications in Energy Star®, Blue Angel, RoHS, EPEAT® Silver. Models are sustainable for today and beyond. Lexmark is an industry leader of recycled content with products using at least 35% PCR content and continual focus on improvement. This line is also engineered for Long Life and designed to last and reduce waste.

## Intelligent Design

Every touch point is designed to withstand high usage while meeting accessibility standards. Steel frames support the device and provide durability to help ensure consistent long-term performance. Products are designed for long service life with long-life components and are easily serviced with few tools.



## Manageability

These IoT-ready devices can be remotely managed, including setup, configuration, consumables management, and diagnostics. Wireless capability gives freedom of access and remote firmware updates make it easy to upgrade to the latest apps and security features. Our mobile printing app makes it easier to monitor and manage your print jobs from remote locations, all from the touch of your phone.

## Ongoing professional product support


From easy installation through a lifetime of high volumes of pages, you'll find our devices easy to use and intuitive. From instructional and on-product support videos to simple color-coded guidance for maintenance tasks like changing toner, make our device experience world-class.

\* Print speeds measured in accordance with ISO/IEC 24734 (ESAT). For more information see: [www.lexmark.com/ISOspeeds](http://www.lexmark.com/ISOspeeds).

\*\* Average yield based on approximately 5% print coverage. In demonstration of circular economy principles, genuine Lexmark supplies with Unison™ Toner may contain components recovered from the Lexmark Cartridge Collection Program (LCCP). Lexmark Return Program cartridges are subject to the terms and conditions of the Lexmark Return Program. See [lexmark.com/returnprogram](http://lexmark.com/returnprogram) for more information. Regular cartridges without the terms and conditions of the Lexmark Return Program are available on [lexmark.com](http://lexmark.com) or through Lexmark Channel Partners.

\*\*\* The Trusted Platform Module (TPM) is not available in some countries.

Lexmark C2335

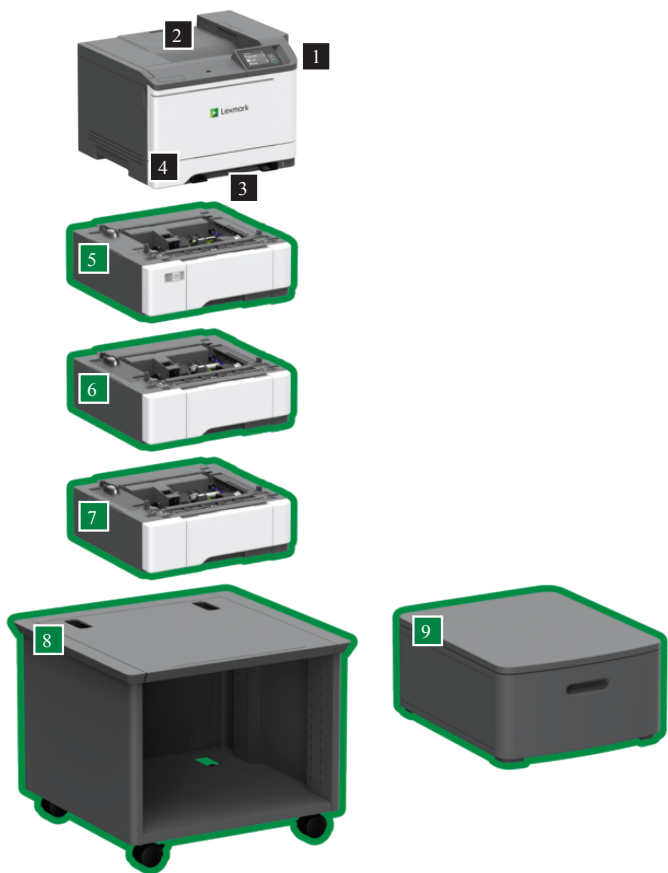

- 1

**Printer with 2.8-inch (7.2 cm) touch screen**  
12.50 x 17.90 x 16.60 in.  
318.30 x 455 x 422.50 mm
- 2

**170-Sheet output bin**  
Dimensions included as part of base model
- 3

**Single sheet multipurpose feeder**  
Dimensions included as part of base model
- 4

**250-Sheet tray**  
Dimensions included as part of base model
- 5

**650-Sheet Duo Tray**  
5.2 x 16.7 x 16.4 in.  
132.1 x 424.2 x 416.6 mm

- 6

**550-Sheet Tray**  
5.2 x 16.7 x 16.4 in.  
132.1 x 424.2 x 416.6 mm
- 7

**550-Sheet Tray**  
5.2 x 16.7 x 16.4 in.  
132.1 x 424.2 x 416.6 mm
- 8

**Adjustable Stand**  
20.5 x 25.7 x 24.6 in.  
521 x 653 x 625 mm
- 9

**Swivel Cabinet**  
10.4 x 18.7 x 23.6 in.  
263 x 476 x 600 mm

Standard

Optional

|            |                                                                                            |
|------------|--------------------------------------------------------------------------------------------|
| <b>P/N</b> | <b>Hardware</b>                                                                            |
| 50M0160    | Lexmark C2335                                                                              |
| <b>P/N</b> | <b>Supplies</b>                                                                            |
| 24B7537    | Lexmark C2335, XC2335 Cyan 11.7K Toner Cartridge                                           |
| 24B7538    | Lexmark C2335, XC2335 Magenta 11.7K Toner Cartridge                                        |
| 24B7539    | Lexmark C2335, XC2335 Yellow 11.7K Toner Cartridge                                         |
| 24B7540    | Lexmark C2335, XC2335 Black 20K Toner Cartridge                                            |
| 75M0W00    | Lexmark CS531, 632, 639, CX532, 635, C2335, XC2335 30K Waste Toner Bottle                  |
| 75M0ZK0    | Lexmark CS531, 632, 639, CX532, 635, C2335, XC2335 Black Return Program 150K Imaging Kit   |
| 75M0ZV0    | Lexmark CS531, 632, 639, CX532, 635, C2335, XC2335 4-Color Return Program 150K Imaging Kit |
| <b>P/N</b> | <b>Paper Handling</b>                                                                      |
| 50M7550    | 550-Sheet Tray                                                                             |
| 50M7650    | 650-Sheet Duo Tray                                                                         |
| <b>P/N</b> | <b>Memory Options</b>                                                                      |
| 57X9528    | Intelligent Storage Device (ISD)                                                           |
| <b>P/N</b> | <b>Application Solutions</b>                                                               |
| 57X0300    | Contact Authentication Device                                                              |
| 57X0301    | Contactless Authentication Device                                                          |
| 82S1203    | IPDS License                                                                               |
| 82S1204    | Bar Code License                                                                           |
| <b>P/N</b> | <b>Connectivity</b>                                                                        |
| 1021294    | USB Cable (2-meter)                                                                        |
| SPD0001    | Surge Protective Device, 110-120V                                                          |
| <b>P/N</b> | <b>Furniture</b>                                                                           |
| 3073173    | Swivel Cabinet                                                                             |
| 40C2300    | Adjustable Stand                                                                           |

Up to 3 optional 550-sheet trays, or one optional 650-sheet duo tray and up to 2 optional 550-sheet trays with the 650-sheet duo tray on top  
All measurements are shown as height x width x depth. For more information about supported configurations, refer to the Printer, Option and Stand Compatibility Guide at [https://publications.lexmark.com/publications/furniture\\_safety](https://publications.lexmark.com/publications/furniture_safety)

| Product Specifications                      |                                                                                                                                                                                                                                                | Lexmark C2335 |
|---------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| Printing                                    |                                                                                                                                                                                                                                                |               |
| Display                                     | 2.8 inch (7.2 cm) Color touch screen                                                                                                                                                                                                           |               |
| Print Speed                                 | Up to: Black: 35 ppm <sup>1</sup> (Letter) / Color: 35 ppm <sup>1</sup> (Letter)                                                                                                                                                               |               |
| Time to First Page                          | As fast as: Black: 7.1 seconds / Color: 7.6 seconds                                                                                                                                                                                            |               |
| Print Resolution                            | Black: 1200 x 1200 dpi, 4800 Color Quality / Color: 4800 Color Quality, 1200 x 1200 dpi                                                                                                                                                        |               |
| Memory                                      | Standard: 1024 MB / Maximum: 1024 MB                                                                                                                                                                                                           |               |
| Hard Disk                                   | Intelligent Storage Drive (optional); Magnetic Hard Disk (optional)                                                                                                                                                                            |               |
| Recommended Monthly Page Volume             | 1,500 - 10,000 pages <sup>2</sup>                                                                                                                                                                                                              |               |
| Maximum Monthly Duty Cycle                  | Up to: 100,000 pages per month <sup>3</sup>                                                                                                                                                                                                    |               |
| Supplies <sup>4</sup>                       |                                                                                                                                                                                                                                                |               |
| Laser Cartridge Yields                      | up to: 20,000 <sup>5</sup> -page Black Cartridge / up to: 11,700 <sup>5</sup> -page Color (CMY) Cartridges                                                                                                                                     |               |
| Cartridge(s) Shipping with Product          | 3,000 <sup>5</sup> -page Black Return Program Toner Cartridge <sup>5</sup> , 2,000 <sup>5</sup> -page Color (CMY) Return Program Toner Cartridges <sup>5</sup>                                                                                 |               |
| Paper Handling                              |                                                                                                                                                                                                                                                |               |
| Included Paper Handling                     | 170-Sheet Output Bin, Integrated Duplex, Single sheet multipurpose feeder, 250-Sheet Tray                                                                                                                                                      |               |
| Optional Paper Handling                     | 650-Sheet Duo Tray, 550-Sheet Tray                                                                                                                                                                                                             |               |
| Paper Input Capacity                        | Up to: Standard: 251 pages 20 lb or 75 gsm bond / Maximum: 2001 pages 20 lb or 75 gsm bond                                                                                                                                                     |               |
| Paper Output Capacity                       | Up to: Standard: 170 pages 20 lb or 75 gsm bond / Maximum: 170 pages 20 lb or 75 gsm bond                                                                                                                                                      |               |
| Media Types Supported                       | Vinyl Labels, Paper Labels, Card Stock, Plain Paper, Envelopes, Refer to the Card Stock & Label Guide.                                                                                                                                         |               |
| Media Sizes Supported                       | A6, Oficio, 7 3/4 Envelope, 9 Envelope, JIS-B5, A4, Legal, A5, Hagaki Card, Letter, B5 Envelope, Statement, C5 Envelope, Executive, Universal, DL Envelope, Folio, 10 Envelope                                                                 |               |
| General Information <sup>6</sup>            |                                                                                                                                                                                                                                                |               |
| Standard Ports                              | Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear USB 2.0 Specification Hi-Speed Certified Port (Type A), 802.11a/b/g/n/ac + Apple iBeacon, USB 2.0 Specification Hi-Speed Certified (Type B) |               |
| Noise Level                                 | Operating: 51 dBA (Print)                                                                                                                                                                                                                      |               |
| Specified Operating Environment             | Altitude: 0 - 2900 Meters (9,500 Feet) / Humidity: 15 to 80% Relative Humidity / Temperature: 10 to 32.2°C (50 to 90°F)                                                                                                                        |               |
| Limited Warranty                            | See Statement of Limited Warranty: 1-Year Onsite Service, Next Business Day                                                                                                                                                                    |               |
| Size / Weight                               | H x W x D: 12.50 x 17.90 x 16.60 in. / 45.31 lb.                                                                                                                                                                                               |               |
| ENERGY STAR Typical Electricity Consumption | TEC: 0.46 kilowatt-hours per week                                                                                                                                                                                                              |               |

All information is subject to change without notice. Lexmark is not liable for any errors or omissions.

<sup>1</sup> Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: [www.lexmark.com/ISOspeeds](http://www.lexmark.com/ISOspeeds).

<sup>2</sup> "Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. <sup>3</sup> "Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. <sup>4</sup> Product functions only with replacement cartridges designed for use in a specific geographical region. See [www.lexmark.com/regions](http://www.lexmark.com/regions) for more details. <sup>5</sup> Average yield based on approximately 5% print coverage.

<sup>6</sup> Printers are sold subject to certain license/agreement conditions. See [www.lexmark.com/printerlicense](http://www.lexmark.com/printerlicense) for details.

© 2023 Lexmark. All rights reserved.

Lexmark, the Lexmark logo and Unison are trademarks of Lexmark International, Inc., registered in the United States and/or other countries.

Apple and AirPrint are trademarks of Apple Inc., registered in the U.S. and other countries and regions. MOPRIA®, the Mopria® Logo and the Mopria® Alliance™ logos are registered and/or unregistered trademarks and service marks of Mopria Alliance, Inc. in the United States and other countries. Unauthorized use is strictly prohibited. ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the U.S. Environmental Protection Agency. EPEAT® is a trademark of the Green Electronics Council in the United States and other countries. All other trademarks are the property of their respective owners.

This product includes software developed by the OpenSSL Project for use in the Open SSL Toolkit (<http://www.openssl.org/>).



[lexmark.com](http://lexmark.com)