



Lexmark MS911de

High-volume output, long-life components, solid security and advanced finishing make the Lexmark MS911de the ultimate SRA3-capable monochrome printer from Lexmark.

Part Number

26Z0040

Print Technology

Black & White Laser Printer

Function

Printing

Workgroup Size

Departmental Workgroup

Touch Screen Display

Yes

Display

Lexmark e-Task 4.3-inch (10.9 cm) colour touch screen

Print Speed (A4, Black)

Up to 55 ppm⁶

Print Speed (A4, Black) Duplex

Up to 55 spm⁶

Time to First Page (Black)

As fast as < 5.5 seconds

Duplex (2-sided) Printing

Integrated Duplex

Print Resolution, Black

1200 IQ (1200 x 600 dpi), 1200 x 1200 dpi, 2400 IQ (2400 x 600 dpi), 600 x 600 dpi

Processor

Dual Core, 800 MHz

Memory, Standard

512 MB

Memory, Maximum

2560 MB

Hard Disk

Option available

Apple Operating Systems Supported

Apple OS X (10.6, 10.7, 10.8, 10.9, 10.10)

Linux Operating Systems Supported

SUSE Linux Enterprise Server 10, 11, SUSE Linux Enterprise Desktop 10, 11, Red Flag Linux Desktop 6.0, Linpus Linux Desktop 9.6, Debian GNU/Linux 5.0, 6.0, Red Hat Enterprise Linux WS 4.0, 5.0, 6.0, PCLinuxOS 2011, Mint 10, 11, 12, 13, openSUSE 11.4, 12.1, 12.2, Ubuntu 12.04, 12.10, Fedora 17, 18, 19

Microsoft Windows Operating Systems Supported

Windows XP, Windows Server 2003, Windows XP x64, Windows Server 2003 x64, Windows Vista, Windows Vista x64, Windows Server 2008, Windows Server 2008 x64, Windows 7, Windows 7 x64, Windows Server 2008 R2, Windows 8, Windows 8 x64, Windows Server 2012, Windows 8.1, Windows 8.1 x64, Windows Server 2012 R2, Windows RT, Windows RT 8.1, Windows 10

Novell Operating Systems Supported

Novell NetWare 6.5 Open Enterprise Server, Novell NetWare 5.1(SP 6+), 6.0(SP 3+) with Novell Distributed Print Services (NDPS), Novell Open Enterprise Server on SUSE Linux Enterprise Server

UNIX Operating Systems Supported

HP-UX 11.11, 11.23, 11.31, Sun Solaris SPARC 9, 10, 11, Sun Solaris x86 10, 11, IBM AIX 5.3, 6.1, 7.1

Included Paper Handling

250-Sheet Output Bin, 150-Sheet Multipurpose Feeder, 2 x 500-Sheet Input

Optional Paper Handling

Staple Punch Finisher, Inline Stapler, 2500-Sheet Tandem Tray, 3000-Sheet Tray, Booklet Finisher, 2 x 500-Sheet Tray

Paper Input Capacity, Standard

Up to 1150 pages 75 gsm bond

Paper Input Capacity, Maximum

Up to 6650 pages 75 gsm bond

Paper Output Capacity, Standard

Up to 250 pages 75 gsm bond

Paper Output Capacity, Maximum

Up to 3500 pages 75 gsm bond

Paper Weight Range Supported - Standard Tray (gsm)

60 - 256 gsm

Paper Weight Range Supported - Multipurpose Feeder (gsm)

60 - 256 gsm

A3

Yes

Finishing Option

Yes

Finishing Functions

Offset stacking, Stapling, Hole punching, Booklet fold and saddle stapling

Number of Paper Inputs, Standard

3

Number of Paper Inputs, Maximum

6

Media Types Supported

Card Stock, Envelopes, Labels, Plain Paper, Transparencies, Refer to the Card Stock & Label Guide.

Media Sizes Supported

10 Envelope, 7 3/4 Envelope, 9 Envelope, A3, A4, A5, B5 Envelope, C5 Envelope, DL Envelope, Executive, Folio, JIS-B4, JIS-B5, Ledger, Legal, Letter, Statement, Universal, Super Tabloid (12 x 18"), Oficio, A6, SRA3

Standard Ports

One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Two Rear USB 2.0 Specification Hi-Speed Certified ports (Type A)

Optional Local Ports

Internal RS-232C serial, Internal 1284-B Bidirectional Parallel

Optional Network Ports

Internal MarkNet N8350 802.11b/g/n Wireless

Direct USB

Yes

Ethernet Network

Yes

Network Protocol Support

TCP/IP IPv4, AppleTalk™, TCP/IP IPv6, TCP, UDP

Network Printing Methods

LPR/LPD, Direct IP (Port 9100), Enhanced IP (Port 9400), Secure IP (Port 96xx), FTP, TFTP, ThinPrint .print integration, Telnet, IPP 1.0, 1.1, 2.0 (Internet Printing Protocol), Microsoft Web Services WSD, Pull Printing

Network Management Protocols¹

HTTP, HTTPS (SSL/TLS), SNMPv1, SNMPv2c, SNMPv3, WINS, IGMP, BOOTP, RARP, APIPA (AutoIP), DHCP, ICMP, DNS, DDNS, mDNS, ARP, NTP, Telnet, Finger,

Network Security

SNMPv3, 802.1x Authentication: MD5, MSCHAPv2, LEAP, PEAP, TLS, TTLS, IPSec

Printable Area (metric)

4.2, 3, 3, 3 mm of the top, bottom, right and left edges (within)

Printer Languages (Standard)

PCL 5e Emulation, PCL 6 Emulation, Personal Printer Data Stream (PPDS), PostScript 3 Emulation, Direct Image, Microsoft XPS (XML Paper Specification), AirPrint™, PDF 1.7 emulation

Fonts and Symbol Sets

3 of 9 scalable PCL 5e fonts in Narrow, Regular and Wide, 158 scalable PostScript fonts, 2 PCL bitmap fonts, 39 scalable PPDS fonts, 5 PPDS bitmap fonts, 84 scalable PCL fonts, OCR-A, OCR-B scalable PCL 5e fonts, For more information, refer to the Technical Reference.

Laser Cartridge Yields (up to)⁵

, 32,500-page High Yield Cartridge

Photoconductor Estimated Yield

Up to 125,000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage⁴

Cartridge(s) Shipping with Product

21,000-page Toner Cartridge

Packaged Size (mm - H x W x D)

965 x 762 x 838 mm

Packaged Weight, kg

90 kg

Size (mm - H x W x D)

770 x 615 x 697 mm

Weight

74 kg

Size, Trays Extended (mm - H x W x D)

762 x 953 x 1127 mm

Noise Level, Idle

28 dBA

Noise Level (Print), Operating

54 dBA

Duplex Print Noise Level, Operating

55 dBA

ENERGY STAR

No

Average Power (Hibernate Mode)

0.5 watts

Average Power (Sleep Mode)

2.4 watts

Average Power (Ready Mode)

190 watts

Average Power (Printing)

910 watts

Average Power while Printing Duplex

830 watts

ENERGY STAR Typical Electricity**Consumption (TEC)**

1.28 kilowatt-hours per week

Product Warranty

1-Year Base Warranty Service

Product Certifications

ICES-003 Class A, BSMI Class A, VCCI Class A, FCC Class A, NOM-032, cTUV, US FDA/CDRH, cTUVus, IEC 60825-1, CB Report, NCC Mark, FCC, CE (EU) DoC, EFTA (CE), KCC, RCM, CCC, C-tick DoC, EuP, CECF, CEL, ECMA-370, TED, GOST-R, SII, TER, Bel GISS, SABS, TUV-AR, KC mark, BIS, TUV-GS Mark, China Green Product (CGP)

Maximum Monthly Duty Cycle

Up to 300,000 pages per month³

Recommended Monthly Page Volume

15,000 - 59,000 pages²

Specified Operating Environment

Altitude: 0 - 2500 metres, Humidity: 15 to 85%

Relative Humidity, Temperature: 10 to 30°C

(50 to 86°F)

Country of Origin

China (PRC)

UNSPSC Code

43212105

¹This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (<http://www.openssl.org/>)


²"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage.

³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs.

⁴Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity.

⁵Average standard page yield value declared in accordance with ISO/IEC 19752.

⁶Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds.

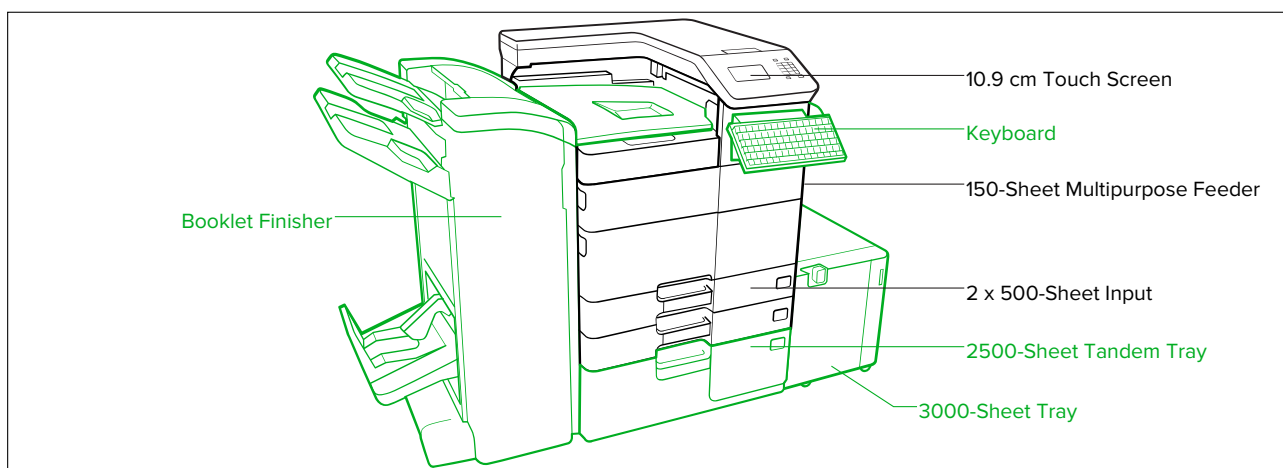

Standard
 Optional

P/N	Toner Cartridges	P/N	Extended Warranties
25A0013	Staple Cartridges (3 pack)	2356945	MS911 1 Year Post Wty OSR NBD
54G0P00	Photoconductor Unit		Extended Warranty
54G0W00	Waste Toner Bottle	2364920	MS911 6 Years Total (1+5) Onsite
54G0H00	MS911 High Yield Toner Cartridge	2364921	Repair Next Business Day
			MS911 2 Years renewal OnSite
			Service, Response Time Next
			Business Day
		2364922	MS911 3 Years renewal OnSite
			Service, Response Time Next
			Business Day
		2364923	MS911 4 Years renewal OnSite
			Service, Response Time Next
			Business Day
		2367164	MS911 7 Years Total (1+6) Onsite
			Repair Next Business Day
		2356940	MS911 1-Year Onsite Service
		2356941	MS911 2-Year Onsite Service
		2356942	MS911 3-Year Onsite Service
		2356943	MS911 4-Year Onsite Service
		2356944	MS911 1-Year Onsite Service Renewal
P/N	Paper Handling	P/N	Service Parts
26Z0087	2500-Sheet Tandem Tray (A4)	40X9704	Image Transfer Kit
26Z0089	3000-Sheet Tray (A4)	40X9673	Multipurpose Feeder Maintenance
26Z0085	2 x 500-Sheet Tray		Kit
26Z0083	CS92x, CX92x, MS911, MX91x	40X9669	300K Maintenance Kit
	Booklet Finisher (3-Hole)	40X9046	Fuser
26Z0081	CS92x, CX92x, MS911, MX91x Staple	40X9936	Developer unit
	Punch Finisher (3-Hole)		
26Z0084	MS911, MX910, MX911 Inline Stapler		
26Z0088	3000-Sheet Tray (Letter)		
26Z0091	MS911, MX91x Banner Media Tray		
26Z0082	MS911, MX91x Booklet Finisher (4-		
	Hole)		
26Z0080	MS911, MX91x Staple Punch Finisher		
	(4-Hole)		
P/N	Furniture	P/N	Service Parts
26Z0094	Cabinet with casters	40X9704	Image Transfer Kit
		40X9673	Multipurpose Feeder Maintenance
			Kit
		40X9669	300K Maintenance Kit
		40X9046	Fuser
		40X9936	Developer unit
P/N	Memory Options	P/N	Service Parts
27X0200	320+ GB Hard Disk		
57X9016	1024MBx32 DDR3-DRAM		
57X9012	2048MBx32 DDR3-DRAM		
57X9101	256MB Flash Memory Card		
P/N	Application Solutions	P/N	Service Parts
57X0300	Contact Authentication Device		
57X0301	Contactless Authentication Device		
57X0210	Elatec Reader Authentication Device		
26Z0024	MS911 Card for IPDS		
26Z0023	MS911 Forms and Bar Code Card		
26Z0025	MS911 Card for PRESCRIBE Emulation		
P/N	Connectivity	P/N	Service Parts
27X0142	Lexmark MarkNet™ N8230 Fiber		
	Ethernet Print Server		
1021231	Parallel (10') Cable		
1021294	USB (2 Meter) Cable		
14F0100	RS-232C Serial Interface Card		
14F0000	Parallel 1284-B Interface Card		
27X0225	MarkNet N8350 802.11b/g/n Wireless		
	Print Server		
57X7000	English Keyboard Kit		
27X0310	MarkNet N8350 Wireless Print Server		
	plus NFC		
SPD0002	Surge Protective Device, 220-240V		