



# Lexmark MX911dte

With output up to 55 ppm and a 300,000-page maximum monthly duty cycle, advanced features and output-size options, the Lexmark MX911dte is a step up in multifunction products from Lexmark.

**Part Number**

26Z0183

**Print Technology**

Monochrome Laser

**Function**

Color Scanning, Copying, Faxing, Network Scanning, Printing

**Workgroup Size**

Departmental Workgroup

**Touch Screen Display**

Yes

**Display**

Lexmark e-Task 10-inch (25 cm) class color touch screen

**Print Speed (A4, Black)**

Up to 55 ppm<sup>6</sup>

**Print Speed (A4, Black) Duplex**

Up to 55 spm<sup>6</sup>

**Time to First Page (Black)**

As fast as < 5.5 seconds

**Duplex (2-sided) Printing**

Integrated Duplex

**Print Resolution, Black**

1200 IQ (1200 x 600 dpi), 1200 x 1200 dpi, 2400 IQ (2400 x 600 dpi), 600 x 600 dpi

**Copy Speed (A4, Black)**

Up to 55 cpm<sup>6</sup>

**Copy Speed (A4, Black) Duplex**

Up to 55 spm<sup>6</sup>

**Time to First Copy (Black)**

As fast as 5.8 seconds

**Reduce / Enlarge Range**

25 - 400 %

**A4/Ltr Simplex Scan Speed (Black)**

Up to 80 sides per minute

**Scan Speed (A4/Ltr, Colour)**

Up to 80 sides per minute

**A4/Ltr Duplex Scan Speed (Black)**

Up to 140 sides per minute

**Duplex Scan Speed (A4/Ltr, Colour)**

Up to 140 sides per minute

**Scan Area, Maximum (mm)**

297 x 432 mm

**ADF Scan**

DADF (single pass Duplex)

**Scanner Type**

Flatbed scanner with ADF

**Scan Technology**

CIS / CCD Hybrid

**Optical Scanning Resolution**

600 X 600 ppi (black), up to 600 X 600 ppi (color)

**Scan File Formats (Send as)**

JPEG, JPG, PDF, Secure PDF, TIFF, XPS, Archival PDF (A-1a, A-1b), Searchable PDF (optional OCR with 1GB RAM and hard disk required), Highly compressed PDF (1GB RAM and hard disk required)

**Scan Destinations**

e-mail, FTP, USB Flash drive, USB or Network connected computer, Lexmark Document Solutions Suite (LDSS)

**Modem Speed**

ITU T.30, V.34 Half-Duplex, 33.6 Kbps

**Fax Transmission Speed**

< 3 seconds per page

**Processor**

Dual Core, 0.8 MHz

**Memory, Standard**

1024 MB

**Memory, Maximum**

3072 MB

**Hard Disk**

Included in configuration

**Apple Operating Systems Supported**

Apple OS X (10.6, 10.7, 10.8, 10.9, 10.10)

**Linux Operating Systems Supported**

SUSE Linux Enterprise Server 10, 11, SUSE Linux Enterprise Desktop 10, 11, Red Flag Linux Desktop 6.0, Linpus Linux Desktop 9.6, Debian GNU/Linux 5.0, 6.0, Red Hat Enterprise Linux WS 4.0, 5.0, 6.0, PCLinuxOS 2011, Mint 10, 11, 12, 13, openSUSE 11.4, 12.1, 12.2, Ubuntu 12.04, 12.10, Fedora 17, 18, 19

**Microsoft Windows Operating Systems Supported**

Windows XP, Windows Server 2003, Windows XP x64, Windows Server 2003 x64, Windows Vista, Windows Vista x64, Windows Server 2008, Windows Server 2008 x64, Windows 7, Windows 7 x64, Windows Server 2008 R2, Windows 8, Windows 8 x64, Windows Server 2012, Windows 8.1, Windows 8.1 x64, Windows Server 2012 R2, Windows RT, Windows RT 8.1

**Novell Operating Systems Supported**

Novell NetWare 6.5 Open Enterprise Server, Novell NetWare 5.1(SP 6+), 6.0(SP 3+) with Novell Distributed Print Services (NDPS), Novell Open Enterprise Server on SUSE Linux Enterprise Server

**UNIX Operating Systems Supported**

HP-UX 11.11, 11.23, 11.31, Sun Solaris SPARC 9, 10, 11, Sun Solaris x86 10, 11, IBM AIX 5.3, 6.1, 7.1

**Included Paper Handling**

250-Sheet Output Bin, 150-Sheet Multipurpose Feeder, 2 x 500-Sheet Input, 2 x 500-Sheet Tray

**Optional Paper Handling**

Staple Punch Finisher, Inline Stapler, 3000-Sheet Tray, Booklet Finisher

**Paper Input Capacity, Standard**

Up to 2150 pages 75 gsm bond

**Paper Input Capacity, Maximum**

Up to 5150 pages 75 gsm bond

**Paper Output Capacity, Standard**

Up to 250 pages 75 gsm bond

**Paper Output Capacity, Maximum**

Up to 3500 pages 75 gsm bond

**Paper Weight Range Supported - Standard Tray (gsm)**

60 - 256 gsm

**Paper Weight Range Supported - Multipurpose Feeder (gsm)**

60 - 256 gsm

**A3**

Yes

**ADF**

100-Sheet Automatic Document Feeder

**ADF Paper Input Capacity**

Up to 100 pages 75 gsm bond

**ADF Paper Output Capacity**

Up to 100 pages 75 gsm bond

**Finishing Option**

Yes

**Finishing Functions**

Offset stacking, Stapling, Hole punching, Booklet fold and saddle stapling

**Number of Paper Inputs, Standard**

5

**Number of Paper Inputs, Maximum**

6

**Media Types Supported**

Card Stock, Envelopes, Labels, Plain Paper, Transparencies, Refer to the Card Stock & Label Guide.

**Media Sizes Supported**

10 Envelope, 7 3/4 Envelope, 9 Envelope, A3, A4, A5, B5 Envelope, C5 Envelope, DL Envelope, Executive, Folio, JIS-B4, JIS-B5, Ledger, Legal, Letter, Statement, Universal, Super Tabloid (12 x 18"), Oficio, A6, SRA3

**Standard Ports**

One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Two Rear USB 2.0 Specification Hi-Speed Certified ports (Type A)

**Optional Local Ports**

Internal RS-232C serial, Internal 1284-B Bidirectional Parallel

**Optional Network Ports**

Internal MarkNet N8350 802.11b/g/n Wireless

**Direct USB**

Yes

**Ethernet Network**

Yes

**Network Protocol Support**

TCP/IP IPv4, AppleTalk™, TCP/IP IPv6, TCP, UDP

**Network Printing Methods**

LPR/LPD, Direct IP (Port 9100), Enhanced IP (Port 9400), Secure IP (Port 96xx), FTP, TFTP, ThinPrint .print integration, Telnet, IPP 1.0, 1.1, 2.0 (Internet Printing Protocol), Microsoft Web Services WSD, Pull Printing

**Network Management Protocols<sup>1</sup>**

HTTP, HTTPS (SSL/TLS), SNMPv1, SNMPv2c, SNMPv3, WINS, IGMP, BOOTP, RARP, APIPA (AutoIP), DHCP, ICMP, DNS, DDNS, mDNS, ARP, NTP, Telnet, Finger,

**Network Security**

SNMPv3, 802.1x Authentication: MD5, MSCHAPv2, LEAP, PEAP, TLS, TTLS, IPSec

**Printable Area (metric)**

4.2, 3, 3, 3 mm of the top, bottom, right and left edges (within)

**Printer Languages (Standard)**

PCL 5e Emulation, PCL 6 Emulation, Personal Printer Data Stream (PPDS), PostScript 3 Emulation, xHTML, Direct Image, Microsoft XPS (XML Paper Specification), AirPrint™, PDF 1.7 emulation

**Fonts and Symbol Sets**

3 of 9 scalable PCL 5e fonts in Narrow, Regular and Wide, 158 scalable PostScript fonts, 2 PCL bitmap fonts, 39 scalable PPDS fonts, 5 PPDS bitmap fonts, 84 scalable PCL fonts, OCR-A, OCR-B scalable PCL 5e fonts, For more information, refer to the Technical Reference.

**Laser Cartridge Yields (up to)<sup>5</sup>**

, 32,500-page High Yield Cartridge

**Photoconductor Estimated Yield**

Up to 125,000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage<sup>4</sup>

**Cartridge(s) Shipping with Product**

21,000-page Toner Cartridge

**Packaged Size (mm - H x W x D)**

1422 x 762 x 838 mm

**Packaged Weight, kg**

138 kg

**Size (mm - H x W x D)**

1152 x 615 x 697 mm

**Weight**

121 kg

**Size, Trays Extended (mm - H x W x D)**

1553 x 953 x 1246 mm

**Noise Level, Idle**

31 dBA

**Noise Level (Print), Operating**

53 dBA

**Duplex Print Noise Level, Operating**

55 dBA

**Noise Level (Copy), Operating**

54 dBA

**Noise Level (Scan), Operating**

56 dBA

**ENERGY STAR**

No

**Average Power (Hibernate Mode)**

0.6 watts

**Average Power (Sleep Mode)**

3.45 watts

**Average Power (Ready Mode)**

220 watts

**Average Power (Printing)**

925 watts

**Average Power while Printing Duplex**

850 watts

**Average Power (Copying)**

950 watts

**Average Power (Scanning)**

230 watts

**ENERGY STAR Typical Electricity****Consumption (TEC)**

1.48 kilowatt-hours per week

**Product Warranty**

1-Year Base Warranty Service

**Product Certifications**

ICES-003 Class A, BSMI Class A, VCCI Class A, FCC Class A, NOM-032, cTUV, US FDA/CDRH, cTUVus, IEC 60825-1, CB Report, NCC Mark, FCC, CE (EU) DoC, EFTA (CE), KCC, RCM, CCC, C-tick DoC, EuP, CECF, CEL, ECMA-370, TED, GOST-R, SII, TER, Bel GISS, SABS, TUV-AR, KC mark, BIS, TUV-GS Mark, China Green Product (CGP)

**Maximum Monthly Duty Cycle**

Up to 300,000 pages per month<sup>3</sup>

**Recommended Monthly Page Volume**

15,000 - 50,000 pages<sup>2</sup>

**Specified Operating Environment**

Altitude: 0 - 2500 metres, Humidity: 15 to 85% Relative Humidity, Temperature: 10 to 30°C (50 to 86°F)

**Country of Origin**

China (PRC)

**UNSPSC Code**

43212110

<sup>1</sup>This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (<http://www.openssl.org/>)


<sup>2</sup>"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage.

<sup>3</sup>"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs.

<sup>4</sup>Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity.

<sup>5</sup>Average standard page yield value declared in accordance with ISO/IEC 19752.

<sup>6</sup>Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: [www.lexmark.com/ISOspeeds](http://www.lexmark.com/ISOspeeds).

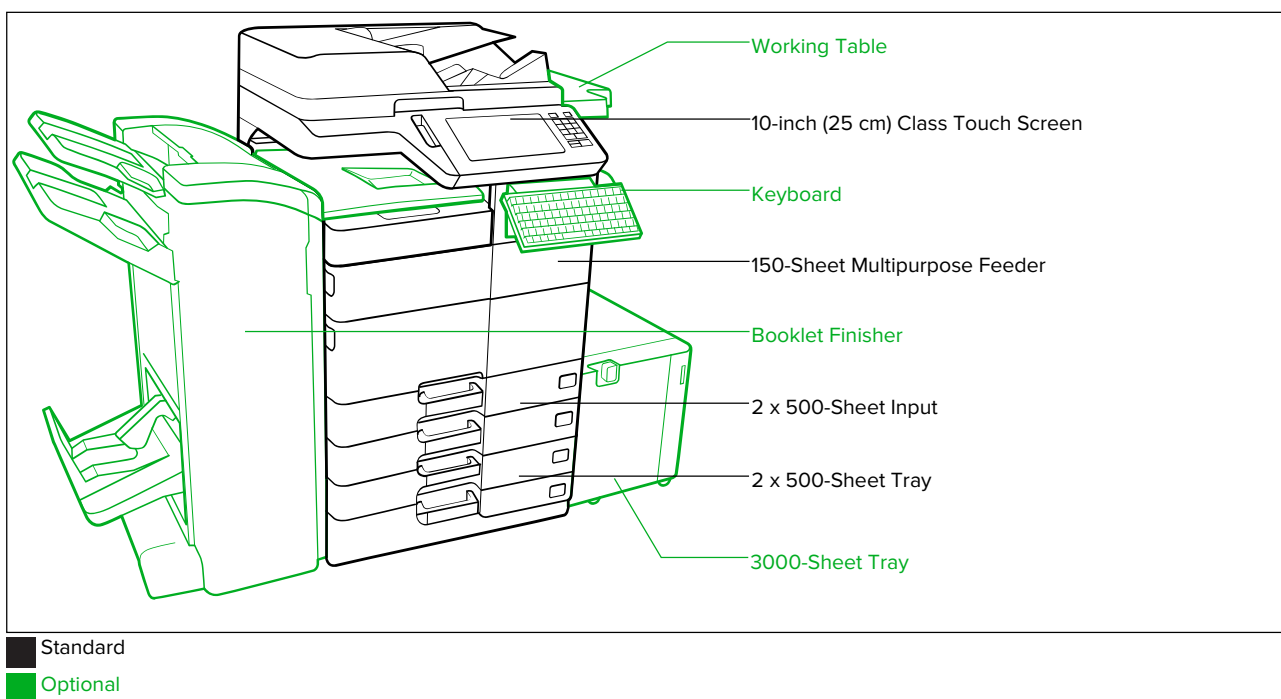

#### P/N Toner Cartridges

25A0013	Staple Cartridges (3 pack)
64G0H00	MX910, MX911, MX912 High Yield Toner Cartridge
54G0P00	Photoconductor Unit
54G0W00	Waste Toner Bottle

#### P/N Paper Handling

26Z0089	3000-Sheet Tray (A4)
26Z0084	MS911, MX910, MX911 Inline Stapler
26Z0091	MS911, MX91x Banner Media Tray
26Z0082	MS911, MX91x Booklet Finisher (4-Hole)
26Z0080	MS911, MX91x Staple Punch Finisher (4-Hole)

#### P/N Furniture

26Z0090	Working Shelf
---------	---------------

#### P/N Memory Options

57X9016	1024MBx32 DDR3-DRAM
57X9012	2048MBx32 DDR3-DRAM
57X9101	256MB Flash Memory Card

#### P/N Application Solutions

57X0300	Contact Authentication Device
57X0301	Contactless Authentication Device
57X0210	Elatec Reader Authentication Device
57X0250	Elatec TWN4 MultiTech-P LEGIC 42 Kit Bosch-SPR000264
26Z0196	MX910, MX911, MX912 Card for IPDS
26Z0195	MX91x Forms and Bar Code Card
26Z0197	MX910, MX911, MX912 Card for PRESCRIBE Emulation

#### P/N Connectivity

27X0142	Lexmark MarkNet™ N8230 Fiber Ethernet Print Server
1021231	Parallel (10') Cable
1021294	USB (2 Meter) Cable
14F0100	RS-232C Serial Interface Card
14F0000	Parallel 1284-B Interface Card
27X0225	MarkNet N8350 802.11b/g/n Wireless Print Server
57X7000	English Keyboard Kit

#### P/N Connectivity

27X0310	MarkNet N8350 Wireless Print Server plus NFC
57X7025	Voice Guidance Kit
SPD0002	Surge Protective Device, 220-240V

#### P/N Extended Warranties

2356871	MX911 1 Year Post Wty OSR NBD Extended Warranty
2365506	MX911 6 Years Total (1+5) Onsite Repair Next Business Day
2365507	MX911 2 Years renewal OnSite Service, Response Time Next Business Day
2365508	MX911 3 Years renewal OnSite Service, Response Time Next Business Day
2365509	MX911 4 Years renewal OnSite Service, Response Time Next Business Day
2367343	MX911 7 Years Total (1+6) Onsite Repair Next Business Day
2356866	MX911 1-Year Onsite Service
2356867	MX911 2-Year Onsite Service
2356868	MX911 3-Year Onsite Service
2356869	MX911 4-Year Onsite Service
2356870	MX911 1-Year Onsite Service Renewal

#### P/N Service Parts

40X9672	ADF Maintenance Kit
40X9704	Image Transfer Kit
40X9673	Multipurpose Feeder Maintenance Kit
40X9669	300K Maintenance Kit
40X9046	Fuser
40X9936	Developer unit