



Lexmark CX931dtse

The Lexmark CX931dtse large-format colour multifunction is designed for security, usability and reliability for large workgroups at speeds of up to 35 pages per minute*.

Part Number

32D0270

Print Technology

Colour Laser

Function

Colour Copying, Colour Printing, Colour Scanning, Colour Network Scanning, Trusted Platform Module (TPM), The Trusted Platform Module (TPM) is not available in some countries.

Workgroup Size

Large Workgroup

Touch Screen Display

Yes

Display

Lexmark e-Task 7-inch (17.8 cm) colour touch screen

Print Speed (A4, Black)

Do 35 ppm⁴

Print Speed (A4, Colour)

Do 35 ppm⁴

Print Speed (A4, Black) Duplex

Do 35 spm⁴

Print Speed (A4, Colour) Duplex

Do 35 spm⁴

Time to First Page (Black) As fast as

Do 7.2 seconds

Time to First Page (Colour) As fast as

Do 6.2 seconds

Duplex (2-sided) Printing

Integrated Duplex

Print Resolution, Black

1200 x 1200 dpi, 2400 IQ (2400 x 600 dpi)

Print Resolution, Colour

1200 x 1200 dpi, 2400 IQ (2400 x 600 dpi)

Copy Speed (A4, Black)

Do 35 cpm⁴

Copy Speed (A4, Colour)

Do 35 cpm⁴

Copy Speed (A4, Black) Duplex

Do 35 spm⁴

Copy Speed (A4, Colour) Duplex

Do 35 spm⁴

Time to First Copy (Black) as fast as

Do 9.1 seconds

Time to First Copy (Colour) as fast as

Do 8 seconds

Reduce / Enlarge Range

25 - 400 %

A4/Ltr Simplex Scan Speed (Black)

Do 55/55 sides per minute

A4/Ltr Simplex Scan Speed (Colour)

Do 55/55 sides per minute

A4/Ltr Duplex Scan Speed (Black)

Do 27.5/27.5 sides per minute

A4/Ltr Duplex Scan Speed (Colour)

Do 27.5/27.5 sides per minute

Scan Area, Maximum (mm)

297 x 432 mm

ADF Scan

RADF (reversing Duplex)

Scanner Type

Flatbed scanner with automatic document feeder

Scan Resolution, Enhanced

Up to 600 x 600 dpi

Scan Resolution, Optical

Up to 600 dpi

Scan File Formats (Send as)

JPEG, JPG, PDF, Secure PDF, TIFF, Archival PDF (A-1a, A-1b), Searchable PDF

Scan Destinations

e-mail, FTP, USB Flash drive, USB or Network connected computer

Processor Speed

Quad Core 1.2 GHz

Memory, Standard

4096 MB

Memory, Maximum

4096 MB

Hard Disk

Intelligent Storage Drive included; Magnetic Hard Disk (optional)

Apple Operating Systems Supported

Support is provided through AirPrint and AirScan only

Citrix MetaFrame

Microsoft Windows Server 2003 and 2003 X64 Edition with Citrix XenApp 5.0, Microsoft Windows Server 2008 and 2008 X64 Edition with Citrix XenApp 5.0, Microsoft Windows Server 2012 R2 Datacenter Edition running Citrix XenApp 7.5, 6, 7, 8, 9, 11, 12, 13, 14, 15, 16, Microsoft Windows Server 2012 Datacenter Edition running Citrix XenApp 7.5, 6, 7, 8, 9, 11, 12, 13, 14, 15, 16, Microsoft Windows Server 2012 Foundation running Citrix XenApp 6.0, 6.5, Microsoft Windows Server 2012 Essentials running Citrix XenApp 6.0, 6.5, Microsoft Windows Server 2012 Standard running Citrix XenApp 6.0, 6.5, Microsoft Windows Server 2008 R2 Datacenter Edition running Citrix XenApp 7.5, 6, 7, 8, 9, 11, 12, 13, 14, 15, 16, Microsoft Windows Server 2008 R2 Enterprise Edition running Citrix XenApp 6.0, 6.5, Microsoft Windows Server 2008 R2 Standard Edition running Citrix XenApp 6.0, 6.5

Linux Operating Systems Supported

openSUSE Linux 42.3, Fedora 27, 28, 29, Ubuntu 16.04, 18.04 LTS, Debian GNU/Linux 8.11, openSUSE Linux 15, Debian 9.4, Debian GNU/Linux 9.5, Debian GNU/Linux 9.6, Red Hat Linux 7.5, 7.6

Microsoft Windows Operating Systems Supported

Windows 2000, Windows NT (4.00/4.00 Server), Windows Me, Windows XP, Windows Server 2003, Windows 98 2nd Edition, Windows XP x64, Windows Server 2003 running Terminal Services, Windows 2000 Server running Terminal Services, Windows Server 2003 x64, Windows Server 2003 x64 running Terminal Services, Windows Vista, Windows XP x64, Windows Server 2008, Windows Server 2008 x64, Windows Server 2008 running Terminal Services, Windows Server 2008 x64 running Terminal Services, Windows 7, Windows 7 x64, Windows Server 2008 R2, Windows Server 2008 R2 running Terminal Services, Windows 8, Windows 8 x64, Windows Server 2012, Windows 8.1, Windows 8.1 x64, Windows Server 2012 R2, Windows RT, Windows 10, Windows Server 2016, Windows Server 2019, Windows Server 2022, Windows 11

Novell Operating Systems Supported

Novell NetWare 6.5 Open Enterprise Server, Novell Open Enterprise Server 2 (SP3) on SuSE Linux Enterprise Server 10 SP4 (x86 and x64) 3, Novell Open Enterprise Server 11 (SP3) on SuSE Linux Enterprise Server 11 SP4 (x86 and x64), Novell Open Enterprise Server 11 (SP3) on SuSE Linux Enterprise Server 12 SP1 (x86 and x64), Novell Open Enterprise Server 15 (SP1) on SuSE Linux Enterprise Server 11 SP4 (x86 and x64)

Included Paper Handling

100-Sheet Multipurpose Feeder, 520-Sheet Tray, 400-Sheet Output Bin, 3 x 520-Sheet Tray/Caster

Optional Paper Handling

Staple Punch Finisher, Inline Stapler, 520-Sheet Tray, 520-Sheet Tray/Caster Cabinet, Envelope Tray, 2000-Sheet Tray, Dual Catch Bin, 2520-Sheet Tandem Tray/Caster, Work table

Paper Input Capacity, Standard

Do 2180 pages 75 gsm bond

Paper Input Capacity, Maximum

Do 4180 pages 75 gsm bond

Paper Output Capacity, Standard

Do 400 pages 75 gsm bond

Paper Output Capacity, Maximum

Do 2000 pages 75 gsm bond

Paper Weight Range Supported - Standard Tray (gsm)

60 - 256 gsm

Paper Weight Range Supported - Multipurpose Feeder (gsm)

60 - 216 gsm

A3

Yes

ADF

110-Sheet Automatic Document Feeder

ADF Paper Input Capacity

Do 110 pages 75 gsm bond

ADF Paper Output Capacity

Do 110 pages 75 gsm bond

Finishing Option

Yes

Finishing Functions

Offset stacking, Stapling, Hole punching

Number of Paper Inputs, Standard

5

Number of Paper Inputs, Maximum

6

Media Types Supported

Card Stock, Envelopes, Glossy paper, Labels, Plain Paper, Refer to the Paper & Specialty Media Guide

Media Sizes Supported

10 Envelope, 7 3/4 Envelope, 9 Envelope, A3, A4, A5, B5 Envelope, C4 Envelope, C5 Envelope, DL Envelope, Hagaki Card, Executive, Folio, JIS-B4, JIS-B5, Ledger, Legal, Letter, Statement, Oficio, A6

Standard Connectivity

USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear USB 2.0 Specification Hi-Speed Certified port (Type A)

Optional Network Ports

Marknet N8372 WiFi Option

Direct USB

Yes

Ethernet Network

Yes

Network Protocol Support

TCP, UDP, IPSEC w/ IPv4, IPSEC w/ IPv6, ICMP, IGMP, IPv4, IPv6

Network Printing Methods

Enhanced IP (Port 9400), IPP 1.0, 1.1, 2.0 (Internet Printing Protocol), Microsoft Web Services WSD, Pull Printing

Network Management Protocols

WINS, APIPA (AutoIP), DHCP, DNS, DDNS, mDNS, ARP, BOOTP

Network Security

SNMPv3, 802.1x Authentication: MD5, MSCHAPv2, LEAP, PEAP, TLS, TTLS, Certificate Management, SSL Cipher Configuration, TCP/UDP Port Access Control, Security Port Lockdown, TCP Restricted Server List, IPSEC Support (IPv4/IPv6)

Printable Area (metric)

4.2 mm of the top, bottom, right and left edges (within)

Printer Languages (Standard)

PCL 6 Emulation, Personal Printer Data Stream (PPDS), PostScript 3 Emulation, Direct Image, PDF 1.7 emulation, PCL 5, PCLm

Fonts and Symbol Sets

158 scalable PostScript fonts, 39 scalable PPDS fonts, 5 PPDS bitmap fonts, For more information, refer to the Technical Reference., 89 scalable PCL 5/6 fonts, 2 PCL 5/6 bitmap fonts

Laser Cartridge Yields (up to)³

, 28,000-page Black Cartridge, 16,500-page Colour (CMY) Cartridges

Photoconductor Estimated Yield, Black

Do 87,000 pages, based on 5 average letter/ A4-size pages per print job

Photoconductor Estimated Yield, CMY

Do 87,000 pages, based on 5 average letter/ A4-size pages per print job

Cartridge(s) Shipping with Product

5,000-page Black and Colour (CMYK) Toner Cartridges

Replacement Cartridges:

Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/ regions for more details.

Packaged Size (mm - H x W x D)

1325.9 x 764 x 811 mm

Packaged Weight, kg

112 kg

Size (mm - H x W x D)

1119 x 590 x 699.3 mm

Weight

96.9 kg

Size, Trays Extended (mm - H x W x D)

1553 x 953 x 1246 mm

Noise level (Idle mode)

15 dBA

Noise Level (Print), Operating

50 dBA

Duplex Print Noise Level, Operating

50 dBA

Noise Level (Copy), Operating

55 dBA

Noise Level (Scan), Operating

55 dBA

ENERGY STAR

Yes

Average Power (Hibernate Mode)

0.1 watts

Average Power (Sleep Mode)

1.2 watts

Average Power (Ready Mode)

93 watts

Average Power (Printing)

477 watts

Average Power while Printing Duplex

475 watts

ENERGY STAR Typical Electricity**Consumption (TEC)**

0.53 kilowatt-hours per week

Product Guarantee

1-Year Onsite Repair, Next Business Day

Product Certifications

ENERGY STAR, ICES-003 Class A, BSMI Class A, VCCI Class A, FCC Class A, NOM-032, UL, cUL, NOM, US FDA/CDRH, IEC 60825-1, CB Report, ISO-532B, CE (EU) DoC, EFTA (CE), KC logo, CCC, C-tick DoC, EuP, CECP, CEL, EC 1275/2008, ECMA-370, TED, SII, TER, SABS, UL-AR, GS Mark, Green Dot, ISO-9296, COC, CCD-035 EcoLogo, Green Mark, EPEAT, China Green Product (CGP), Mopria Certified

Maximum Monthly Duty Cycle

Do 150 000 pages per month²

Recommended Monthly Page Volume

4000 - 20000 pages¹

Specified Operating Environment

Humidity: 8 to 80% Relative Humidity, Altitude: 0 - 2500 Metres (8,200 Feet), Temperature: 10 to 32°C (50 to 90°F)

Country of Origin

North America & TAA Compliant - Mexico, Rest of World - Vietnam

UNSPSC Code


43212110

¹"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage.

²"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs.

³Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798.

⁴Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds.

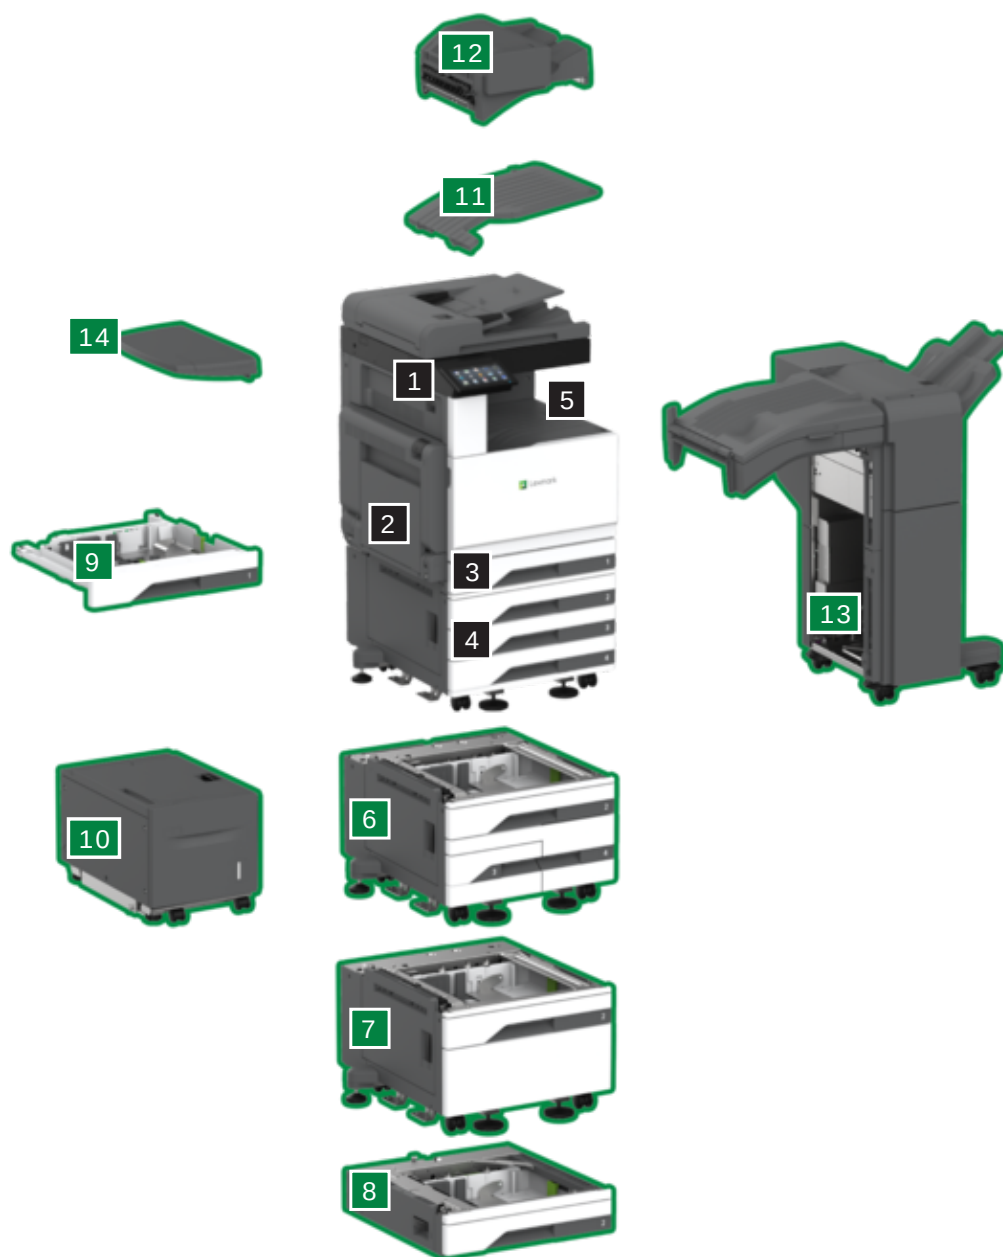

Callout	Availability	Description
1	Standardno	17.8 cm (7-inch) Touch Screen
10	Dodatna opcija	2,000-Sheet Tray (sidecar)
11	Dodatna opcija	Dual Catch Bin
12	Dodatna opcija	Inline Stapler
13	Dodatna opcija	Staple Punch Finisher
14	Dodatna opcija	Work Table
2	Standardno	100-Sheet Multipurpose Feeder
3	Standardno	520-Sheet Input Tray
4	Standardno	3 x 520-Sheet Tray with casters
5	Standardno	400-Sheet Output Bin
6	Dodatna opcija	2,520-Sheet Tandem Tray with casters
7	Dodatna opcija	520-Sheet Tray with Caster Cabinet
8	Dodatna opcija	520-Sheet Tray
9	Dodatna opcija	Envelope Tray

P/N	Spremnici s tonerom	P/N	Produljeno jamstvo
85D00C0	Lexmark CX930, 931 Cyan 5K Toner Cartridge	2373329	CX931 4 Year Renewal Onsite Repair, Response Time Next Business Day
85D00M0	Lexmark CX930, 931 Magenta 5K Toner Cartridge	2373330	CX931 1 Year Post Wty OSR NBD Extended Warranty
85D00Y0	Lexmark CX930, 931 Yellow 5K Toner Cartridge	2373347	CX931 3 Year Parts Only Extended Warranty
85D00K0	Lexmark CX930, 931 Black 5K Toner Cartridge	2373348	CX931 4 Year Parts Only Extended Warranty
85D0HC0	Lexmark CX930, 931 Cyan 16.5K Toner Cartridge	2373349	CX931 5 Year Parts Only Extended Warranty
85D0HM0	Lexmark CX930, 931 Magenta 16.5K Toner Cartridge	2373350	CX931 6 Year Parts Only Extended Warranty
85D0HY0	Lexmark CX930, 931 Yellow 16.5K Toner Cartridge	2373351	CX931 1 Year Renewal Parts Only
85D0HK0	Lexmark CX930, 931 Black 28K Toner Cartridge	2373352	CX931 2 Year Renewal Parts Only
85D0P00	Lexmark CX930, 931, XC9325, 9335 fotovodič s crnim tonerom za 87000 stranica	2373353	CX931 3 Year Renewal Parts Only
85D0Q00	Lexmark CX930, 931, XC9325, 9335 komplet fotovodiča za 87000 stranica, pakiranje od 3 kom.	2373354	CX931 4 Year Renewal Parts Only
85D0W00	Lexmark CX930, 931, XC9325, 9335 spremnik otpadnog tonera za 40000 stranica		
25A0013	Staple Cartridges (3 pack)		
P/N	Rukovanje papirom		
32D0800	520-Sheet Tray		
32D0801	520-Sheet Tray with Caster Cabinet		
32D0802	3 x 520-Sheet Tray with Casters		
32D0803	2,520-Sheet Tandem Tray with Casters		
32D0804	Envelope Tray		
32D0816	2,000-Sheet Tray (sidecar)		
32D0818	Dual Catch Bin		
32D0820	Inline Staple Finisher		
32D0821	Staple (2/3) Hole Punch Finisher		
32D0822	Staple (2/4) Hole Punch Finisher		
P/N	Namještaj		
32D0808	CX93x/MX93x Work Table		
P/N	Mogućnosti memorije		
27X0400	500+ GB Hard Disk		
57X0070	Removable Hard Disk Enclosure Kit		
P/N	Aplikacijska rješenja		
57X0300	Contact Authentication Device		
57X0301	Contactless Authentication Device		
82S1204	Bar Code License		
82S1203	IPDS License		
P/N	Povezivost		
27X6410	Lexmark MarkNet N8372 802.11 a/b/g/n/ac Wireless Print Server		
57X7040	English Keyboard Kit		
37X6350	Analog Fax Card		
1021294	USB (2 Meter) Cable		
P/N	Produljeno jamstvo		
2373320	CX931 1 Year Onsite Repair NBD Warranty		
2373321	CX931 2 Year Onsite Repair NBD Warranty		
2373322	CX931 3 Year Onsite Repair NBD Warranty		
2373323	CX931 4 Year Onsite Repair NBD Warranty		
2373324	CX931 5 Year Onsite Repair NBD Warranty		
2373325	CX931 6 Year Onsite Repair NBD Warranty		
2373327	CX931 2 Year Renewal Onsite Repair, Response Time Next Business Day		
2373328	CX931 3 Year Renewal Onsite Repair, Response Time Next Business Day		