



Lexmark C3426dw

Maximise your productivity at the lowest operational cost with the CarbonNeutral® certified Lexmark Colour Printer 4-series. Fastest print speed (compared with other Lexmark GO Line models).

Part Number

40N9410

Print technology

Colour Laser Printer

Workgroup size

Small-medium workgroup

Touch screen display

No

Display

2.8 inch (7.2 cm) Colour touch screen

Print speed (A4, black)

Up to 24 ppm⁵

Print speed (A4, colour)

Up to 24 ppm⁵

Print speed (A4, black) duplex

Up to 13 spm⁵

Print speed (A4, colour) duplex

Up to 13 spm⁵

Time to first page (black)

As fast as 10.9 seconds

Time to first page (colour)

As fast as 11 seconds

Duplex (2-sided) printing

Automatic 2-sided printing

Print resolution, black

4800 CQ (2400 x 600 dpi)

Print resolution, colour

4800 CQ (2400 x 600 dpi)

Processor speed

Dual Core, 1.0 GHz

Memory, standard

512 MB

Memory, maximum

512 MB

Hard Disk

Not available

Apple Operating Systems Supported

Support is provided through AirPrint and AirScan only

Citrix MetaFrame

Microsoft Windows 2000 Server running Terminal Services with Citrix Presentation Server 3.0, 4.0, Microsoft Windows Server 2003 x64 running Terminal Services with Citrix Presentation Server 4.0 x64, 4.5 x64, Microsoft Windows Server 2003 running Terminal Services with Citrix Presentation Server 4.0, 4.5, Microsoft Windows Server 2003 and 2003 X64 Edition with Citrix XenApp 5.0

Linux operating systems supported

SUSE Linux Enterprise Server 10, 11, 12, openSUSE Linux 42.3, Fedora 27, 28, 29, Ubuntu 16.04, 18.04 LTS, Red Hat Enterprise Linux WS 6.10, 7.5, 7.6, Debian 9.4, 9.5, 9.6, Debian GNU/Linux 8.11, openSUSE Linux 15

Microsoft Windows operating systems supported

Windows 7, Windows 7 x64, Windows 8, Windows 8 x64, Windows 10, Windows Server 2016, Windows 11

Novell operating systems supported

Novell NetWare 6.5 Open Enterprise Server, Novell Open Enterprise Server 2 (SP3) on SuSE Linux Enterprise Server 10 SP4 (x86 and x64) 3, Novell Open Enterprise Server 11 (SP3) on SuSE Linux Enterprise Server 11 SP4 (x86 and x64), Novell Open Enterprise Server 11 (SP3) on SuSE Linux Enterprise Server 12 SP1 (x86 and x64), Novell Open Enterprise Server 15 (SP1) on SuSE Linux Enterprise Server 11 SP4 (x86 and x64)

Standard paper handling

250-sheet input, Single-sheet manual feed, 100-Sheet Output Bin, Automatic 2-sided printing

Paper input capacity, standard

Up to 250+1 pages

Paper input capacity, maximum

Up to 250+1 pages

Paper output capacity, standard

Up to 100 pages

Paper output capacity, maximum

Up to 100 pages

Paper weight range supported - standard tray

60 - 162 g/m²

Finishing

No

Number of paper inputs, standard

2

Number of paper inputs, maximum

2

Media types supported

Card Stock, Envelopes, Glossy paper, Paper Labels, Plain Paper, Refer to the Paper & Specialty Media Guide

Media sizes supported

10 Envelope, 7 3/4 Envelope, 9 Envelope, A4, A5, B5 Envelope, C5 Envelope, DL Envelope, Hagaki card, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal, Oficio, A6

Standard connectivity

USB 2.0 Specification Hi-Speed Certified (Type B), 802.11b/g/n Wireless, Gigabit Ethernet (10/100/1000; RJ-45)

Direct USB

No

Ethernet network

Yes

Wireless

Yes

Network protocol support

TCP/IP IPv4, TCP/IP IPv6, TCP, UDP, IPSEC w/ IPv4, IPSEC w/ IPv6, ICMP, IGMP, 802.1x

Network printing methods

LPR/LPD, Enhanced IP (Port 9400), FTP, TFTP, IPP 1.0, 1.1, 2.0 (Internet Printing Protocol), Microsoft Web Services WSD

Network management protocols¹

HTTP, HTTPS (SSL/TLS), SNMPv1, SNMPv2c, SNMPv3, WINS, IGMP, BOOTP, RARP, APIPA (AutoIP), DHCP, ICMP, DNS, DDNS, mDNS, ARP, NTP, Finger,

Network security

SNMPv3, IPSec

Printable area

4.2 mm of the top, bottom, right and left edges (within)

Printer languages (standard)

PCL 5c Emulation, PCL 5e Emulation, PCL 6 Emulation, PostScript 3 Emulation, Direct Image, PDF 1.7 emulation, PCLm

Fonts and symbol sets

3 of 9 scalable PCL 5e fonts in Narrow, Regular and Wide, 2 PCL bitmap fonts, OCR-A, OCR-B scalable PCL 5e fonts, For more information, refer to the Technical Reference., 91 scalable PostScript fonts, 89 scalable PCL fonts

Cartridge yields: up to⁴

1500-page black and colour (CMY) cartridges, , 4,500-page Black and Colour (CMYK) Extra High Yield Cartridges

Cartridge(s) shipped with product

1500-page colour (CMY) Return Programme toner cartridges, 1500-page black Return Programme toner cartridge

Replacement cartridges:

Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/ regions for more details.

Packaged size (HxWxD)

519 x 332 x 556 mm

Packaged weight

19.1 kg

Size (HxWxD)

243.7 x 411.2 x 394.1 mm

Weight

16.1 kg

Noise level, idle

14 dBA

Noise Level (Print), Operating

51/53 dBA

Duplex print noise level, operating

50/53 dBA

Quiet mode

46 dBA

Energy Star

Yes

Average power in Hibernate mode

NA Watt

Average power in Sleep mode

1.2 Watt

Average power in Ready mode

17 Watt

Average power while printing

400 Watt

Average power while printing duplex

275 Watt

Energy Star Typical Electricity Consumption (TEC)

0.36 kWh per week

Product guarantee

3 Year Guarantee (register) On Site Service

Product certifications

ENERGY STAR, DE-UZ 219, ICES-003 Class B, US FDA/CDRH, UL 60950-1, FCC Class B, cUL CAN/CSA-C22.2 60950-1, CB EN/IEC 60950-1, CB EN/IEC 60825-1, CE DoC (EN 62311, EN 55022(Class B), EN 55024, EN 61000, EN 61000, UL), EFTA (CE), KCC, CCC, CECP, CEL, RCM DoC, UL-AR, KC mark, UL GS mark, UCRF, Wi-Fi CERTIFIED, China Green Product (CGP), Mopria Certified

Maximum monthly duty cycle

Up to 50000 pages per month³

Recommended monthly page volume

600 - 2500 pages²

Specified operating environment

Humidity: 8 to 80% Relative Humidity, Altitude: 0 - 3048 meters, Temperature: 10 to 32°C (50 to 90°F)

License/Agreement Terms

Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/printerlicense for details.

Country of origin

China (PRC)

UNSPSC code

43212105


¹This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (<http://www.openssl.org/>)

²"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage.

³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs.

⁴Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798.

⁵Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds.

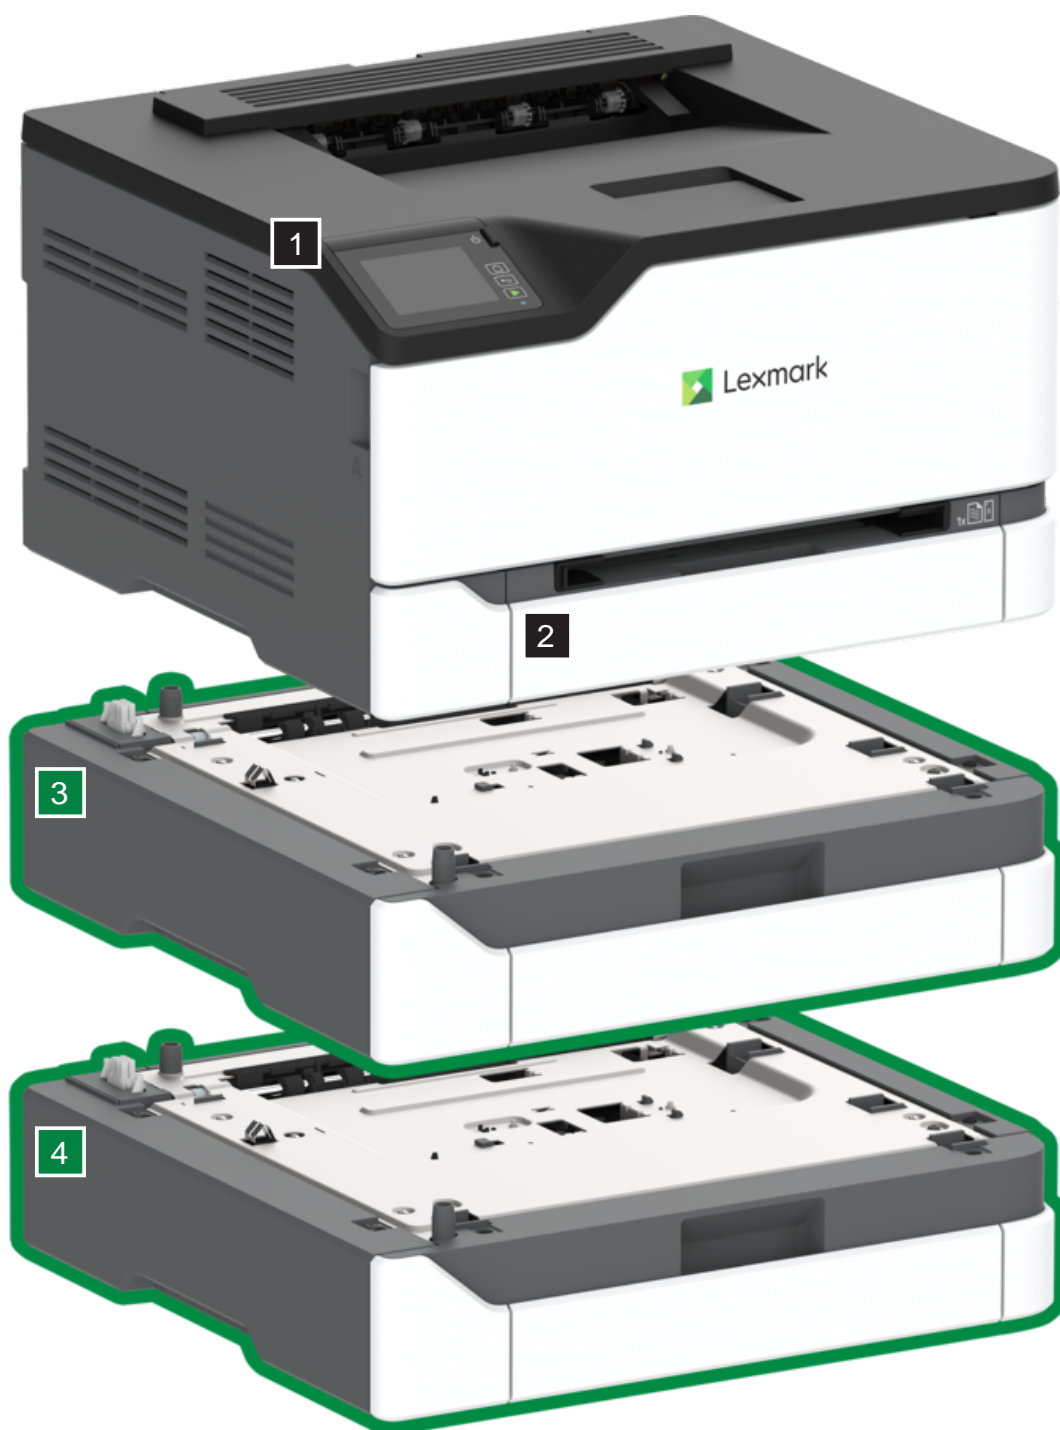

Callout	Availability	Description
1	Standard	250-Sheet Input
2	Standard	
3	Optional	
4	Optional	

P/N	Toner Cartridges
20N0W00	Lexmark CS/CX331, 431, C/MC3224, 3326, 3426 15K Waste Container
C3220C0	Lexmark C/MC3224, 3326, 3426 Cyan Return Programme 1.5K Print Cartridge
C3220M0	Lexmark C/MC3224, 3326, 3426 Magenta Return Programme 1.5K Print Cartridge
C3220Y0	Lexmark C/MC3224, 3326, 3426 Yellow Return Programme 1.5K Print Cartridge
C3220K0	Lexmark C/MC3224, 3326, 3426 Black Return Programme 1.5K Print Cartridge
C342XC0	Lexmark C342XC0 Cyan Extra High Yield Return Programme Print Cartridge
C342XM0	Lexmark C/MC3426 Magenta Return Programme 4.5K Print Cartridge
C342XY0	Lexmark C/MC3426 Yellow Return Programme 4.5K Print Cartridge
C342XK0	Lexmark C/MC3426 Black Return Programme 4.5K Print Cartridge
C340X20	Lexmark C/MC3426 Cyan 4.5K Print Cartridge
C340X30	Lexmark C/MC3426 Magenta 4.5K Print Cartridge
C340X40	Lexmark C/MC3426 Yellow 4.5K Print Cartridge
C340X10	Lexmark C/MC3426 Black 4.5K Print Cartridge

P/N	Paper Handling
40N4250	250-Sheet Tray

P/N	Furniture
40C2300	CS72x, CX725 Printer Stand (adjustable height)

P/N	Connectivity
1021294	USB Cable (2 meter)

P/N	Extended Warranties
2371534	C3426 1-Year Onsite Service Renewal
2371535	C3426 2-Year Onsite Service Renewal
2371536	C3426 Per Call 1-Time Onsite Repair NBD Warranty
2371537	C3426 1-Year Post Warranty Onsite Repair NBD
2371527	C3426 3 Year Upgrade Onsite Repair Next Business Day
2371544	C3426 Per Call Preventive Maintenance w/ Kit
2372743	CS730 1 Year Onsite Repair NBD Warranty