



Lexmark MC3426i

Maximise your productivity with the fastest automatic 2-sided scanning at the lowest operational cost with the Lexmark Colour All-in-One 4-series. Print, copy, scan, cloud fax. Fastest print and scan speeds (compared with other Lexmark GO Line models).

Part Number

40N9750

Print technology

Colour Laser All-in-One

Functionality

Colour Copying, Colour Printing, Colour Scanning, Optional cloud faxing, Subject to subscription with etherFAX®. A trial package (up to 3 months or 300 pages, whichever comes first) is included free of subscription charge; other fees, such as telecommunication charges, may apply. Contact etherFAX (www.etherfax.net) for details. Trial may be withdrawn without notice. Service may not be available in all locations. Analogue faxing via phone line is not supported by this device.

Workgroup size

Small-medium workgroup

Touch screen display

Yes

Display

2.8 inch (7.2 cm) Colour touch screen

Print speed (A4, black)

Up to 24 ppm⁴

Print speed (A4, colour)

Up to 24 ppm⁴

Print speed (A4, black) duplex

Up to 13 spm⁴

Print speed (A4, colour) duplex

Up to 13 spm⁴

Time to first page (black)

As fast as 10.8 seconds

Time to first page (colour)

As fast as 11 seconds

Duplex (2-sided) printing

Automatic 2-sided printing

Print resolution, black

4800 CQ (2400 x 600 dpi)

Print resolution, colour

4800 CQ (2400 x 600 dpi)

Copy speed (A4, black)

Up to 24.7 cpm⁴

Copy speed (A4, colour)

Up to 24.7 cpm⁴

Copy speed (A4, black) duplex

Up to 13 spm⁴

Copy speed (A4, colour) duplex

Up to 13 spm⁴

Time to first copy (black)

As fast as 13.1 seconds

Time to first copy (colour)

As fast as 13.1 seconds

Reduce / enlarge range

25 - 400 %

Simplex scan speed (A4, black)

Up to 45 / 48 spm

Simplex scan speed (A4, colour)

Up to 20 / 21 spm

Duplex scan speed (A4, black)

Up to 90 / 96 spm

Duplex scan speed (A4, colour)

Up to 40 / 42 spm

Scan area, maximum

216 x 356 mm

ADF scan

Automatic single-pass 2-sided document feeder

Scanner type

Flatbed scanner with automatic document feeder

Scan technology

Contact Image Sensor (CIS)

Scan resolution, enhanced

Up to 600 X 600 dpi

Scan resolution, optical

Up to 600 dpi

Scan file formats (send as)

JPEG, JPG, PDF, TIFF

Scan destinations

e-mail, FTP, USB Flash drive, USB or Network connected computer

Processor speed

Dual Core, 1.0 GHz

Memory, Standard

1 GB

Memory, Maximum

1 GB

Hard Disk

Not available

Apple Operating Systems Supported

Support is provided through AirPrint and AirScan only

Citrix MetaFrame

Microsoft Windows Server 2003 running Terminal Services with Citrix Presentation Server 3.0, 4.0, 4.5, Microsoft Windows Server 2008 and 2008 X64 Edition with Citrix XenApp 5.0, Microsoft Windows Server 2008 R2 with Citrix XenApp 6.0, 6.5, Microsoft Windows Server 2012 with Citrix XenApp 6.0, 6.5

Linux operating systems supported

SUSE Linux Enterprise Server 10, 11, 12, openSUSE Linux 42.3, Fedora 27, 28, 29, Ubuntu 16.04, 18.04 LTS, Red Hat Enterprise Linux WS 6.10, 7.5, 7.6, Debian 9.4, 9.5, 9.6, Debian GNU/Linux 8.11, openSUSE Linux 15

Microsoft Windows operating systems supported

Windows 7, Windows 7 x64, Windows 8, Windows 8 x64, Windows 8.1, Windows 8.1 x64, Windows 10, Windows Server 2016, Windows 11

Novell operating systems supported

Novell NetWare 6.5 Open Enterprise Server, Novell Open Enterprise Server 2 on SUSE Linux Enterprise Server 10 SP4, Novell Open Enterprise Server 11 (SP3) on SuSE Linux Enterprise Server 11 SP4 (x86 and x64), Novell Open Enterprise Server 11 (SP3) on SuSE Linux Enterprise Server 12 SP1 (x86 and x64), Novell Open Enterprise Server 15 (SP1) on SuSE Linux Enterprise Server 11 SP4 (x86 and x64)

Standard paper handling

250-sheet input, Single-sheet manual feed, 100-Sheet Output Bin, Automatic 2-sided printing

Paper input capacity, standard

Up to 250+1 pages

Paper input capacity, maximum

Up to 750+1 pages

Paper output capacity, standard

Up to 100 pages

Paper output capacity, maximum

Up to 100 pages

Paper weight range supported - standard tray

60 - 162 g/m²

Autom. document feeder (ADF)

50-sheet autom. document feeder

ADF paper input capacity

Up to 50 pages

ADF paper output capacity

Up to 50 pages

Finishing

No

Number of paper inputs, standard

2

Number of paper inputs, maximum

4

Media types supported

Card Stock, Glossy paper, Paper Labels, Plain Paper, Hagaki card, Refer to the Paper & Specialty Media Guide

Media sizes supported

10 Envelope, 7 3/4 Envelope, 9 Envelope, A4, A5, B5 Envelope, C5 Envelope, DL Envelope, Hagaki card, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal, Oficio, A6

Standard connectivity

USB 2.0 Specification Hi-Speed Certified (Type B), 802.11b/g/n Wireless, Gigabit Ethernet (10/100/1000; RJ-45), Front Hi-Speed USB port (compatible with USB 2.0 specification, type A)

Direct USB

Yes

Ethernet network

Yes

Wireless

Yes

Network protocol support

TCP/IP IPv4, TCP/IP IPv6, TCP, UDP, IPSEC w/ IPv4, IPSEC w/ IPv6, ICMP, IGMP, 802.1x

Network printing methods

LPR/LPD, Enhanced IP (Port 9400), FTP, TFTP, IPP 1.0, 1.1, 2.0 (Internet Printing Protocol), Microsoft Web Services WSD

Network management protocols¹

HTTP, HTTPS (SSL/TLS), SNMPv1, SNMPv2c, SNMPv3, WINS, IGMP, BOOTP, RARP, APIPA (AutoIP), DHCP, ICMP, DNS, DDNS, mDNS, ARP, NTP, Finger,

Network security

SNMPv3, TCP/IP port access control, 802.1x Authentication: MD5, MSCHAPv2, LEAP, PEAP, TLS, TTLS, IPsec (transport only)

Printable area

4.2 mm of the top, bottom, right and left edges (within)

Printer languages (standard)

PCL 5c Emulation, PCL 5e Emulation, PCL 6 Emulation, PostScript 3 Emulation, Direct Image, PDF 1.7 emulation, PCLm

Fonts and symbol sets

3 of 9 scalable PCL 5e fonts in Narrow, Regular and Wide, 2 PCL bitmap fonts, OCR-A, OCR-B scalable PCL 5e fonts, For more information, refer to the Technical Reference., 91 scalable PostScript fonts, 89 scalable PCL fonts

Cartridge yields: up to

1500-page black and colour (CMY) cartridges, Average continuous cartridge yield is stated number of standard pages as listed. Declared yield value in accordance with ISO/IEC 19798., 4,500-page Black and Colour (CMYK) Extra High Yield Cartridges

Cartridge(s) shipped with product

1500-page colour (CMY) Return Programme toner cartridges, 1500-page black Return Programme toner cartridge

Replacement cartridges:

Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/ regions for more details.

Packaged size (HxWxD)

519 x 440 x 556 mm

Packaged weight

22.7 kg

Size (HxWxD)

344.4 x 411.2 x 394.1 mm

Weight

19.4 kg

Noise level, idle

14 dBA

Noise Level (Print), Operating

51/52 dBA

Duplex print noise level, operating

50/52 dBA

Noise Level (Copy), Operating

50 dBA

Noise Level (Scan), Operating

44 dBA

Quiet mode

45 dBA

Energy Star

Yes

Average power in Hibernate mode

NA Watt

Average power in Sleep mode

1.3 Watt

Average power in Ready mode

17.5 Watt

Average power while printing

400 Watt

Average power while printing duplex

275 Watt

Average power while copying

395 Watt

Average power while scanning

21 Watt

Energy Star Typical Electricity Consumption (TEC)

0.37 kWh per week

Product guarantee

3-year guarantee (upon registration)

Product certifications

ENERGY STAR, DE-UZ 219, ICES-003 Class B, US FDA/CDRH, UL 60950-1, FCC Class B, cUL CAN/CSA-C22.2 60950-1, CB EN/IEC 60950-1, CB EN/IEC 60825-1, CE DoC (EN 62311, CE, CE, EN 61000-3, EN 55022 Class B, EN 55024, UL), EFTA (CE), KCC, CCC, CECP, CEL, UL-AR, KC mark, UL GS mark, EU 1275, ISO 532B, ECMA-370, GOST-R, SII, TER, China Green Product (CGP), Mopria Certified

Maximum monthly duty cycle

Up to 75000 pages per month³

Recommended monthly page volume

750 - 5000 pages²

Specified operating environment

Humidity: 8 to 80% Relative Humidity, Altitude: 0 - 3048 meters, Temperature: 10 to 32°C (50 to 90°F)

License/Agreement Terms

Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/ printerlicense for details.

Country of origin

China (PRC)

UNSPSC code


43212110

¹This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (<http://www.openssl.org/>)

²"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage.

³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs.

⁴Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds.

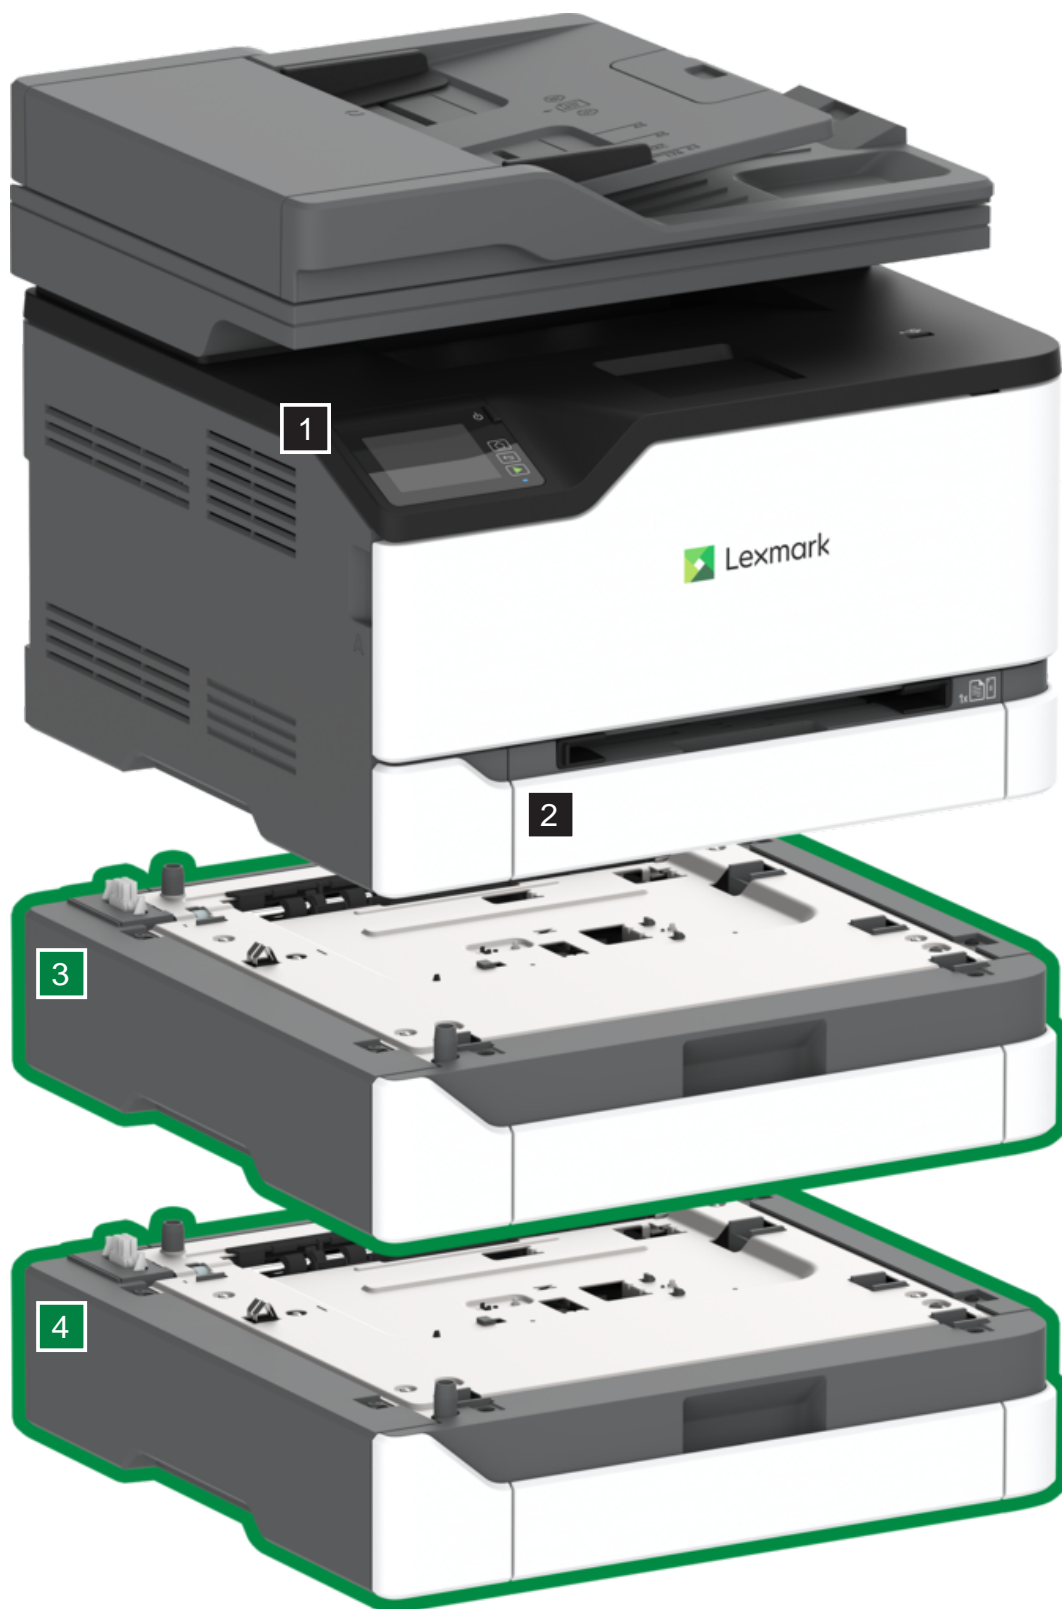

Callout	Availability	Description
1	Standard	
2	Standard	
3	Optional	
4	Optional	

P/N	Toner Cartridges
20N0W00	Lexmark CS/CX331, 431, C/MC3224, 3326, 3426 15K Waste Container
C3220C0	Lexmark C/MC3224, 3326, 3426 Cyan Return Programme 1.5K Print Cartridge
C3220M0	Lexmark C/MC3224, 3326, 3426 Magenta Return Programme 1.5K Print Cartridge
C3220Y0	Lexmark C/MC3224, 3326, 3426 Yellow Return Programme 1.5K Print Cartridge
C3220K0	Lexmark C/MC3224, 3326, 3426 Black Return Programme 1.5K Print Cartridge
C342XC0	Lexmark C342XC0 Cyan Extra High Yield Return Programme Print Cartridge
C342XM0	Lexmark C/MC3426 Magenta Return Programme 4.5K Print Cartridge
C342XY0	Lexmark C/MC3426 Yellow Return Programme 4.5K Print Cartridge
C342XK0	Lexmark C/MC3426 Black Return Programme 4.5K Print Cartridge
C340X20	Lexmark C/MC3426 Cyan 4.5K Print Cartridge
C340X30	Lexmark C/MC3426 Magenta 4.5K Print Cartridge
C340X40	Lexmark C/MC3426 Yellow 4.5K Print Cartridge
C340X10	Lexmark C/MC3426 Black 4.5K Print Cartridge

P/N	Paper Handling
40N4250	250-Sheet Tray

P/N	Furniture
40C2300	CS72x, CX725 Printer Stand (adjustable height)

P/N	Connectivity
27X6410	Lexmark MarkNet N8372 802.11 a/b/g/n/ac Wireless Print Server
1021294	USB Cable (2 meter)

P/N	Extended Warranties
2371665	MC3426 1-Year Post Warranty Onsite Repair NBD
2371664	MC3426 Per Call 1-Time Onsite Repair NBD Warranty
2371662	MC3426 1-Year Onsite Service Renewal
2371663	MC3426 2-Year Onsite Service Renewal
2371655	MC3426 3 Year Upgrade Onsite Repair Next Business Day
2371672	MC3426 Per Call Preventive Maintenance w/ Kit