



Lexmark CX860de

The Lexmark CX860de colour A4 MFP combines print speed of up to 57 pages per minute, ease of use, professional colour and configurable software solutions with available finishing options.

Part Number

42K0080

Print Technology

Colour Laser

Function

Colour Copying, Colour Faxing, Colour Printing, Colour Scanning, Colour Network Scanning

Workgroup Size

Large Workgroup

Touch Screen Display

Yes

Display

Lexmark e-Task 10-inch (25 cm) class colour touch screen

Print Speed (A4, Black)

Do 57 ppm⁶

Print Speed (A4, Colour)

Do 57 ppm⁶

Print Speed (A4, Black) Duplex

Do 57 spm⁶

Time to First Page (Black) As fast as

Do 6.5 seconds

Time to First Page (Colour) As fast as

Do 6.5 seconds

Duplex (2-sided) Printing

Integrated Duplex

Print Resolution, Black

1200 x 1200 dpi, 4800 CQ (2400 x 600 dpi)

Print Resolution, Colour

1200 x 1200 dpi, 4800 CQ (2400 x 600 dpi)

Copy Speed (A4, Black)

Do 57 cpm⁶

Copy Speed (A4, Colour)

Do 57 cpm⁶

Time to First Copy (Black) as fast as

Do 6.0 seconds

Time to First Copy (Colour) as fast as

Do 7.0 seconds

Reduce / Enlarge Range

25 - 400 %

A4/Ltr Simplex Scan Speed (Black)

Do 57 / 60 sides per minute

A4/Ltr Simplex Scan Speed (Colour)

Do 57 / 60 sides per minute

A4/Ltr Duplex Scan Speed (Black)

Do 114 / 120 sides per minute

A4/Ltr Duplex Scan Speed (Colour)

Do 114 / 120 sides per minute

Scan Area, Maximum (mm)

216 x 355 mm

ADF Scan

DADF (single pass Duplex)

Scanner Type

Flatbed scanner with ADF

Scan Technology

CCD

Optical Scanning Resolution

1200 X 600 dpi

Scan File Formats (Send as)

JPEG, JPG, PDF, Secure PDF, TIFF, Archival PDF (A-1a, A-1b), Highly compressed PDF (1GB RAM and hard disk required), Searchable PDF

Scan Destinations

e-mail, FTP, USB Flash drive, USB or Network connected computer, Lexmark Document Solutions Suite (LDSS)

Modem Speed

ITU T.30, V.34 Half-Duplex, 33.6 Kbps

Fax Transmission Speed

< 3 seconds per page

Processor Speed

Quad Core 1.6 GHz

Memory, Standard

2048 MB

Memory, Maximum

4096 MB

Hard Disk

Included in configuration

Apple Operating Systems Supported

Apple OS X (10.6, 10.7, 10.8, 10.9, 10.10, 10.11)

Citrix MetaFrame

Microsoft Windows Server 2008 and 2008 X64 Edition with Citrix XenApp 5.0, Microsoft Windows Server 2008 R2 with Citrix XenApp 6.0, 6.5, Microsoft Windows Server 2012 with Citrix XenApp 6.0, 6.5

Linux Operating Systems Supported

Debian GNU/Linux 7.0, 8.0, Fedora 21, 22, Linpus Linux Lite Desktop 2.1, Linux Mint 13 LTS, 17 LTS, 17.1 LTS, 17.2 LTS, Linux Mint 2 Debian, PCLinuxOS 2014.12, Red Hat Enterprise Linux WS 4, 5, 6, 7, SUSE Linux Enterprise Desktop 10, 11, 12, SUSE Linux Enterprise Server 10, 11, 12, Ubuntu 12.04 LTS, 14.04 LTS, 15.04, openSUSE 13.1, 13.2, openSUSE Tumbleweed

Microsoft Windows Operating Systems Supported

Windows XP, Windows XP x64, Windows Vista, Windows Vista x64, Windows Server 2008, Windows Server 2008 x64, Windows 7, Windows 7 x64, Windows Server 2008 R2, Windows 8, Windows 8 x64, Windows Server 2012, Windows 8.1, Windows 8.1 x64, Windows Server 2012 R2, Windows RT, Windows RT 8.1, Windows 10

Novell Operating Systems Supported

Novell NetWare 6.5 Open Enterprise Server, Novell Open Enterprise Server 2 on SUSE Linux Enterprise Server 10 SP4, Novell Open Enterprise Server 11 on SUSE Linux Enterprise Server 11

UNIX Operating Systems Supported

Sun Solaris x86 10, 11, Sun Solaris SPARC 10, 11, IBM AIX 6.1, 7.1

Included Paper Handling

550-Sheet Input, 100-Sheet Multipurpose Feeder, Integrated Duplex, 500-Sheet Output Bin

Optional Paper Handling

550-Sheet Tray, Staple Punch Finisher, Inline Stapler, 2200-Sheet Tray

Paper Input Capacity, Standard

Do 650 pages 75 gsm bond

Paper Input Capacity, Maximum

Do 4500 pages 75 gsm bond

Paper Output Capacity, Standard

Do 500 pages 75 gsm bond

Paper Output Capacity, Maximum

Do 1950 pages 75 gsm bond

Paper Weight Range Supported - Standard Tray (gsm)

60 - 176 gsm

Paper Weight Range Supported - Multipurpose Feeder (gsm)

60 - 176 gsm

Integrated Tray Card Stock Upper limit (grain short)

Cover - 300 gsm (110 lb), Index Bristol - 300 gsm (166 lb), Tag - 300 gsm (184 lb)

ADF

150-Sheet Automatic Document Feeder

ADF Paper Input Capacity

Do 150 pages 75 gsm bond

ADF Paper Output Capacity

Do 150 pages 75 gsm bond

Finishing Option

Yes

Finishing Functions

Offset stacking, Stapling, Hole punching

Number of Paper Inputs, Standard

2

Number of Paper Inputs, Maximum

6

Media Types Supported

Card Stock, Dual Web Labels, Envelopes, Labels, Plain Paper, Polyester Labels, Vinyl Labels, Refer to the Card Stock & Label Guide., Banner Paper

Media Sizes Supported

10 Envelope, 7 3/4 Envelope, 9 Envelope, A4, A5, B5 Envelope, C4 Envelope, C5 Envelope, DL Envelope, Index Card, Executive, Folio, JIS-B5, Legal, Letter, 4 x 6", Statement, Universal, Oficio, A6

Caster Base

Optional

Standard Connectivity

One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Two Rear USB 2.0 Specification Hi-Speed Certified ports (Type A), Two Front USB 2.0 Specification Hi-Speed Certified port (Type A)

Optional Network Ports

Marknet N8370 WiFi Option

Direct USB

Yes

Ethernet Network

Yes

Wireless

Wireless Option

Network Protocol Support

TCP/IP IPv4, TCP/IP IPv6, TCP, UDP

Network Printing Methods

LPR/LPD, Direct IP (Port 9100), Enhanced IP (Port 9400), Secure IP (Port 96xx), FTP, TFTP, ThinPrint .print integration, Telnet, IPP 1.0, 1.1, 2.0 (Internet Printing Protocol), Microsoft Web Services WSD, Pull Printing

Network Management Protocols¹

HTTP, HTTPS (SSL/TLS), SNMPv1, SNMPv2c, SNMPv3, WINS, IGMP, BOOTP, RARP, APIPA (AutoIP), DHCP, ICMP, DNS, Bonjour, DDNS, mDNS, ARP, NTP, Telnet, Finger,

Network Security

SNMPv3, 802.1x Authentication: MD5, MSCHAPv2, LEAP, PEAP, TLS, TTLS, IPsec

Printable Area (metric)

4.2 mm of the top, bottom, right and left edges (within)

Printer Languages (Standard)

PCL 5c Emulation, PCL 6 Emulation, Personal Printer Data Stream (PPDS), PostScript 3 Emulation, Direct Image, AirPrint™, PDF 1.7 emulation

Fonts and Symbol Sets

3 of 9 scalable PCL 5e fonts in Narrow, Regular and Wide, 2 PCL bitmap fonts, 39 scalable PPDS fonts, 84 scalable PCL fonts, OCR-A, OCR-B scalable PCL 5e fonts, For more information, refer to the Technical Reference., 165 scalable PostScript fonts, 15 PPDS bitmap fonts

Laser Cartridge Yields (up to)⁵

, 55,000-page Black and Colour (CMYK) Ultra High Yield Cartridges, 22,000-page Colour (CMY) Extra High Yield Cartridges, 33,000-page Black Extra High Yield Cartridge, 17,000-page Colour (CMY) High Yield Cartridges, 8,000-page Black and Colour (CMYK) Cartridges

Photoconductor Estimated Yield

Do 175000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage⁴

Cartridge(s) Shipping with Product

8,000-page Black Return Programme Toner Cartridge, 17,000-page Colour (CMY) High Yield Return Programme Toner Cartridges

Replacement Cartridges:

Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/ regions for more details.

Packaged Size (mm - H x W x D)

1114 x 700 x 760 mm

Packaged Weight, kg

96.36 kg

Size (mm - H x W x D)

813 x 559 x 588 mm

Weight

83.2 kg

Noise level (Idle mode)

14 dBA

Noise Level (Print), Operating

56 dBA

Duplex Print Noise Level, Operating

57 dBA

Noise Level (Copy), Operating

59 dBA

Noise Level (Scan), Operating

55 dBA

Quiet Mode

52 dBA

ENERGY STAR

Yes

Average Power (Hibernate Mode)

0.3 watts

Average Power (Sleep Mode)

1.46 watts

Average Power (Ready Mode)

125 watts

Average Power (Printing)

870 watts

Average Power while Printing Duplex

820 watts

Average Power (Copying)

650 watts

Average Power (Scanning)

115 watts

ENERGY STAR Typical Electricity

Consumption (TEC)

0.92 kilowatt-hours per week

Product Guarantee

1-Year Onsite Service

Product Certifications

ENERGY STAR, ICES-003 Class A, BSMI Class A, VCCI Class A, FCC Class A, NOM-032, UL, cUL, NOM, US FDA/CDRH, IEC 60825-1, CB Report, ISO-532B, CE (EU) DoC, EFTA (CE), KC logo, CCC, C-tick DoC, EuP, CECP, CEL, EC 1275/2008, ECMA-370, TED, SII, TER, SABS, UL-AR, GS Mark, Green Dot, ISO-9296, COC, CCD-035 EcoLogo, Green Mark, EPEAT, Blue Angel (Blauer Engel), China Green Product (CGP)

Maximum Monthly Duty Cycle

Do 350000 pages per month³

Recommended Monthly Page Volume

5000 - 50000 pages²

Specified Operating Environment

Humidity: 15 to 80% Relative Humidity, Temperature: 10 to 32°C (50 to 90°F), Altitude: 0 - 2896 Metres (9,500 Feet)

License/Agreement Terms

Printers are sold subject to certain license/ agreement conditions. See www.lexmark.com/ printerlicense for details.

Country of Origin

China (PRC)

UNSPSC Code

43212110

Developer Unit(s) Estimated Yield

Do 300000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage

¹This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (<http://www.openssl.org/>)


²"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage.

³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs.

⁴Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity.

⁵Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798.

⁶Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds.

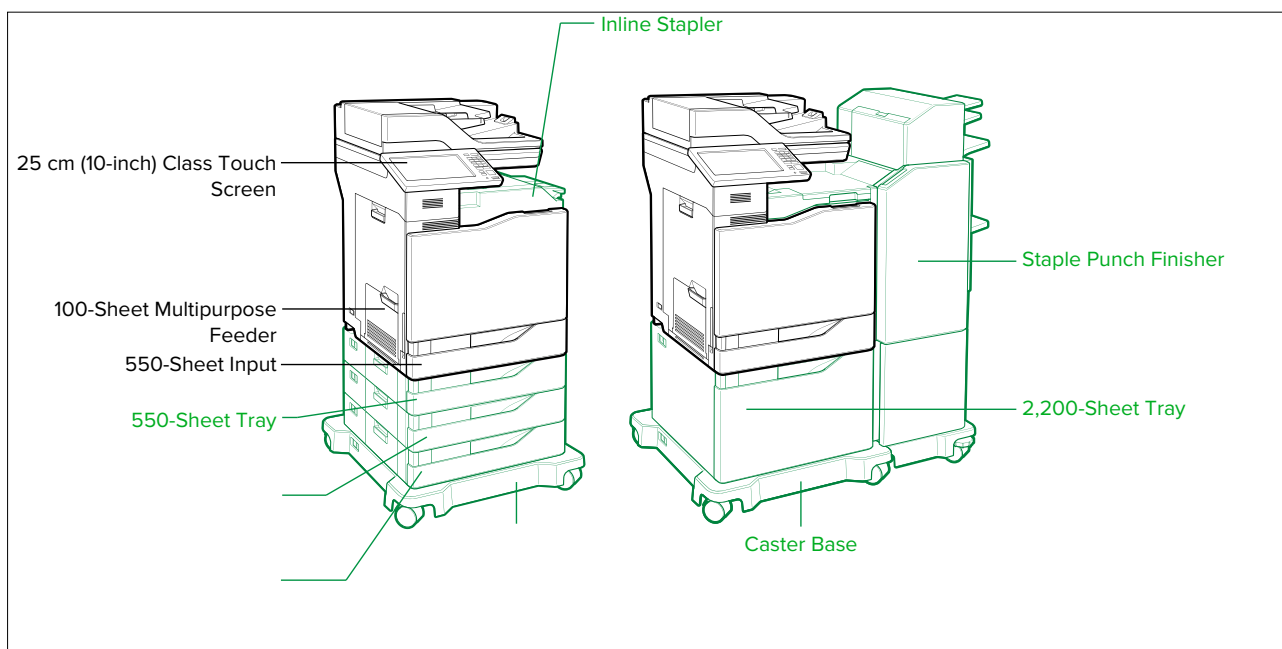

Standardno
 Dodatna opcija

P/N	Spremnici s tonerom	P/N	Spremnici s tonerom	P/N	Spremnici s tonerom
72K2XKE	CS820, CX82x, CX860 Black Extra High Yield Corporate Cartridge (33K)	72K50C0	CS820, CX82x, CX860 Cyan Return Programme Toner Cartridge	82K5HMO	CX82x, CX860 Magenta High Yield Return Programme Toner Cartridge
82K2HCE	CX82x, CX860 Cyan High Yield Corporate Cartridge (17K)	72K50M0	CS820, CX82x, CX860 Magenta Return Programme Toner Cartridge	82K5HY0	CX82x, CX860 Yellow High Yield Return Programme Toner Cartridge
82K2HME	CX82x, CX860 Magenta High Yield Corporate Cartridge (17K)	72K50Y0	CS820, CX82x, CX860 Yellow Return Programme Toner Cartridge	72K20KE	CS820, CX82x, CX860 Black Corporate Cartridge (8K)
82K2HYE	CX82x, CX860 Yellow High Yield Corporate Cartridge (17K)	72K0P00	Photoconductor – 1 Pack	72K20CE	CS820, CX82x, CX860 Cyan Corporate Cartridge (8K)
82K2XCE	CX825, CX860 Cyan Extra High Yield Corporate Cartridge (22K)	72K0Q00	Photoconductor – 3 Pack	72K20ME	CS820, CX82x, CX860 Magenta Corporate Cartridge (8K)
82K2XME	CX825, CX860 Magenta Extra High Yield Corporate Cartridge (22K)	72K0DK0	Black Return Programme Developer Unit	72K20YE	CS820, CX82x, CX860 Yellow Corporate Cartridge (8K)
82K2XYE	CX825, CX860 Yellow Extra High Yield Corporate Cartridge (22K)	72K0D10	Black Developer Unit		
82K2UKE	CX860 Black Ultra High Yield Corporate Cartridge (55K)	72K0DV0	Colour (CMY) Return Programme Developer Kit	P/N	Rukovanje papirom
82K2UCE	CX860 Cyan Ultra High Yield Corporate Cartridge (55K)	72K0D50	Colour (CMY) Developer Kit	42K1598	CX825, CX860 Multi-position Staple Punch Finisher (HV Tall)
82K2UME	CX860 Magenta Ultra High Yield Corporate Cartridge (55K)	82K2UK0	CX860 Black Ultra High Yield Return Programme Toner Cartridge	42K1268	CX825, CX860 Multi-position Staple Punch Finisher (S-HV)
82K2UYE	CX860 Yellow Ultra High Yield Corporate Cartridge (55K)	82K2UC0	CX860 Cyan Ultra High Yield Return Programme Toner Cartridge	21K0787	Envelope Tray
72K0DC0	Cyan Return Programme Developer Unit	82K2UM0	CX860 Magenta Ultra High Yield Return Programme Toner Cartridge	21K0567	550-Sheet Tray
72K0D20	Cyan Developer Unit	82K2UY0	CX860 Yellow Ultra High Yield Return Programme Toner Cartridge	21K0237	2200-Sheet Tray
72K0D30	Magenta Developer Unit	82K0U10	CX860 Black Ultra High Yield Toner Cartridge	42K2300	CX825, CX860 Inline Staple Finisher
72K0DM0	Magenta Return Programme Developer Unit	82K0U20	CX860 Cyan Ultra High Yield Toner Cartridge	P/N	Namještaj
72K0D40	Yellow Developer Unit	82K0U30	CX860 Magenta Ultra High Yield Toner Cartridge	21K2501	Caster Base
72K0DY0	Yellow Return Programme Developer Unit	82K0U40	CX860 Yellow Ultra High Yield Toner Cartridge	P/N	Mogućnosti memorije
72K0W00	Waste Toner Bottle	72K2XK0	Black Extra High Yield Return Programme Toner Cartridge	27X0400	500+ GB Hard Disk
72K0FK0	Black Return Programme Developer and Photoconductor Unit Pack	82K2XC0	CX825, CX860 Cyan Extra High Yield Return Programme Toner Cartridge	57X9022	2GB x64 DDR3 RAM
72K0F10	Black Developer and Photoconductor Unit Pack	82K2XM0	CX825, CX860 Magenta Extra High Yield Return Programme Toner Cartridge	57X9801	256MB Flash Memory Card
72K0FV0	Colour (CMY) Return Programme Developer Kit and Photoconductors Pack	82K2XY0	CX825, CX860 Yellow Extra High Yield Return Programme Toner Cartridge	57X9814	Korean Font Card
72K0F50	Colour (CMY) Developer Kit and Photoconductors Pack	82K5HC0	CX82x, CX860 Cyan High Yield Return Programme Toner Cartridge	57X9815	Japanese Font Card
25A0013	Staple Cartridges (3 pack)			57X9812	Simplified Chinese Font Card
72K50K0	CS820, CX82x, CX860 Black Return Programme Toner Cartridge			57X9810	Traditional Chinese Font Card
				P/N	Aplikacijska rješenja
				21K0127	Forms and Bar Code Card
				21K0128	Card for IPDS
				21K0129	Card for PRESCRIBE Emulation
				57X0300	Contact Authentication Device
				57X0301	Contactless Authentication Device
				57X0210	Elatec Reader Authentication Device
				P/N	Povezivost
				57X7020	English Keyboard Kit

P/N	Povezivost
27X0142	Lexmark MarkNet™ N8230 Fiber Ethernet Print Server
27X6510	MarkNet N8370 802.11 a/b/g/n/ac Wireless Print Server
1021294	USB (2 Meter) Cable

P/N	Produljeno jamstvo
2360039	CX860 2-Years Total (1+1) Onsite Service
2360040	CX860 3-Years Total (1+2) Onsite Service
2360041	CX860 4-Years Total (1+3) Onsite Service
2360042	CX860 5-Years Total (1+4) Onsite Service
2360043	CX860 1-Year Onsite Service Renewal
2367598	CX860,XC8160 2 Years Renewal Onsite Repair w/ Kits Next Business Day
2367599	CX860,XC8160 3 Years Renewal Onsite Repair w/ Kits Next Business Day
2367600	CX860,XC8160 4 Years Renewal Onsite Repair w/ Kits Next Business Day
2365806	CX860,XC8160 6 Years Total (1+5) Onsite Repair Next Business Day
2365807	CX860 2 Years renewal OnSite Service, Response Time Next Business Day
2365808	CX860 3 Years renewal OnSite Service, Response Time Next Business Day
2365809	CX860 4 Years renewal OnSite Service, Response Time Next Business Day

P/N	Dijelovi koje može zamijeniti korisnik
41X0247	Fuser 220-240V
41X0245	Transfer Module
41X0154	Transfer Roller
41X0993	Media Pick Roller
41X0360	ADF Separation Roller
41X0358	ADF Media Pick Roller
41X0359	ADF Feed Belt
41X0931	ADF Maintenance Kit
41X0929	Fuser Maintenance Kit 220-240V