



# Lexmark CS730de

Designed for security, ease of use and sustainability, the Lexmark CS730de delivers professional colour for mid-to-large workgroups at speeds of up to 40 pages per minute\*.

**Part Number**

47C9038

**Print Technology**

Color Laser

**Function**

Color Printing, Trusted Platform Module (TPM), The Trusted Platform Module (TPM) is not available in some countries.

**Workgroup Size**

Medium-Large Workgroup

**Touch Screen Display**

Yes

**Display**

Lexmark e-Task 10.9 cm colour touch screen with audible feedback

**Print Speed (A4, Black)**

Up to 40 ppm<sup>5</sup>

**Print Speed (A4, Colour)**

Up to 40 ppm<sup>5</sup>

**Print Speed (A4, Black) Duplex**

Up to 30.5 spm<sup>5</sup>

**Time to First Page (Black)**

As fast as 6.4 seconds

**Time to First Page (Colour)**

As fast as 7.0 seconds

**Duplex (2-sided) Printing**

Integrated Duplex

**Print Resolution, Black**

1200 x 1200 dpi, 4800 CQ (2400 x 600 dpi)

**Print Resolution, Colour**

1200 x 1200 dpi, 4800 CQ (2400 x 600 dpi)

**Processor Speed**

Quad Core 1.2 GHz

**Memory, Standard**

1024 MB

**Memory, Maximum**

1024 MB

**Hard Disk**

Intelligent Storage Drive available; Magnetic Hard Disk available

**Citrix MetaFrame**

Microsoft Windows 2000 Server running Terminal Services with Citrix Presentation Server 3.0, 4.0, Microsoft Windows Server 2003 running Terminal Services with Citrix Presentation Server 3.0, 4.0, 4.5, Microsoft Windows Server 2003 x64 running Terminal Services with Citrix Presentation Server 4.0 x64, 4.5 x64, Microsoft Windows Server 2003 and 2003 X64 Edition with Citrix XenApp 5.0, Microsoft Windows Server 2008 and 2008 X64 Edition with Citrix XenApp 5.0, Microsoft Windows Server 2008 R2 with Citrix XenApp 6.0, 6.5, Microsoft Windows Server 2012 with Citrix XenApp 6.0, 6.5, Microsoft Windows Server 2012 R2 Datacenter Edition running Citrix XenApp 7.5, 6, 7, 8, 9, 11, 12, 13, 14, 15, 16, Microsoft Windows Server 2012 Datacenter Edition running Citrix XenApp 7.5, 6, 7, 8, 9, 11, 12, 13, 14, 15, 16, Microsoft Windows Server 2008 R2 Datacenter Edition running Citrix XenApp 7.5, 6, 7, 8, 9, 11, 12, 13, 14, 15, 16

**Linux Operating Systems Supported**

openSUSE Linux 42.3, Fedora 27, 28, 29, Ubuntu 16.04, 18.04 LTS, Debian GNU/Linux 8.11, openSUSE Linux 15, Debian 9.4, Debian GNU/Linux 9.5, Debian GNU/Linux 9.6, Red Hat Linux 7.5, 7.6

**Microsoft Windows Operating Systems Supported**

Windows XP, Windows XP x64, Windows Vista, Windows Vista x64, Windows Server 2008, Windows Server 2008 x64, Windows 7, Windows 7 x64, Windows Server 2008 R2, Windows 8, Windows 8 x64, Windows Server 2012, Windows 8.1, Windows Server 2012 R2, Windows RT, Windows 10, Windows Server 2016, Windows Server 2019, Windows Server 2022, Windows 11

**Novell Operating Systems Supported**

Novell NetWare 6.5 Open Enterprise Server, Novell Open Enterprise Server 2 on SUSE Linux Enterprise Server 10 SP4, Novell Open Enterprise Server 11 (SP3) on SuSE Linux Enterprise Server 11 SP4 (x86 and x64), Novell Open Enterprise Server 11 (SP3) on SuSE Linux Enterprise Server 12 SP1 (x86 and x64), Novell Open Enterprise Server 15 (SP1) on SuSE Linux Enterprise Server 11 SP4 (x86 and x64)

**Included Paper Handling**

550-Sheet Input, 100-Sheet Multipurpose Feeder, Integrated Duplex, 300-Sheet Output Bin

**Optional Paper Handling**

550-Sheet Tray

**Paper Input Capacity, Standard**

Up to 650 pages 75 gsm bond

**Paper Input Capacity, Maximum**

Up to 2850 pages 75 gsm bond

**Paper Output Capacity, Standard**

Up to 300 pages 75 gsm bond

**Paper Output Capacity, Maximum**

Up to 300 pages 75 gsm bond

**Paper Weight Range Supported - Standard Tray (gsm)**

60 - 218 gsm

**Paper Weight Range Supported - Multipurpose Feeder (gsm)**

60 - 218 gsm

**Finishing Option**

No

**Number of Paper Inputs, Standard**

2

**Number of Paper Inputs, Maximum**

6

**Media Types Supported**

Card Stock, Envelopes, Paper Labels, Plain Paper, Vinyl Labels, Banner Paper, Refer to the Paper & Specialty Media Guide

**Media Sizes Supported**

10 Envelope, 7 3/4 Envelope, 9 Envelope, A4, A5, B5 Envelope, C5 Envelope, DL Envelope, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal, Oficio, A6

**Caster Base**

No

**Standard Ports**

One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear Hi-Speed USB port Compatible with USB 2.0 Specification (Type A)

**Optional Network Ports**

Internal MarkNet N8370 802.11b/g/n/a Wireless, NFC

**Direct USB**

Yes

**Ethernet Network**

Yes

**Wireless**

Wireless Option

**Network Protocol Support**

TCP/IP IPv4, TCP/IP IPv6, TCP, UDP, IPSEC w/ IPv4, IPSEC w/ IPv6, ICMP, IGMP

**Network Printing Methods**

LPR/LPD, Direct IP (Port 9100), Enhanced IP (Port 9400), Secure IP (Port 96xx), FTP, ThinPrint .print integration, IPP 1.0, 1.1, 2.0 (Internet Printing Protocol), Microsoft Web Services WSD, Pull Printing

**Network Management Protocols<sup>1</sup>**

HTTP, HTTPS (SSL/TLS), SNMPv1, SNMPv2c, SNMPv3, WINS, IGMP, BOOTP, RARP, APIPA (AutoIP), DHCP, ICMP, DNS, DDNS, mDNS, ARP, NTP, Telnet, Finger,

**Network Security**

SNMPv3, 802.1x Authentication: MD5, MSCHAPv2, LEAP, PEAP, TLS, TTLS, Certificate Management, SSL Cipher Configuration, TCP/UDP Port Access Control, Security Port Lockdown, IPSEC Support (IPv4/IPv6)

**Printable Area (metric)**

4.2 mm of the top, bottom, right and left edges (within)

**Printer Languages (Standard)**

PCL 6 Emulation, Personal Printer Data Stream (PPDS), PostScript 3 Emulation, Direct Image, Microsoft XPS (XML Paper Specification), AirPrint™, PDF 1.7 emulation, PCL 5, HTML

**Fonts and Symbol Sets**

158 scalable PostScript fonts, 39 scalable PPDS fonts, 5 PPDS bitmap fonts, For more information, refer to the Technical Reference., 89 scalable PCL 6 fonts, 2 PCL 6 bitmap fonts

**Laser Cartridge Yields (up to)**

22,000-page Black High Yield Cartridge, 10,500-page Colour (CMY) High Yield Cartridges, Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798. Yield stated on cartridge labels, packaging and printer device menu pages may be substantially lower than final ISO tested yield. For Lexmark's official statement of yield, see ISO yield reports at [https://www.lexmark.com/en\\_us/products/supplies-and-accessories/iso-page-yields/color-laser-reports.html](https://www.lexmark.com/en_us/products/supplies-and-accessories/iso-page-yields/color-laser-reports.html). Update firmware on your device to ensure accuracy of displayed yield.

**Imaging Unit Estimated Yield**

Up to 150000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage<sup>4</sup>

**Cartridge(s) Shipping with Product**

5,000-page Black and Colour (CMYK) Return Programme Toner Cartridges

**Replacement Cartridges:**

Product functions only with replacement cartridges designed for use in a specific geographical region. See [www.lexmark.com/regions](http://www.lexmark.com/regions) for more details.

**Packaged Size (mm - H x W x D)**

567 x 625 x 720 mm

**Packaged Weight, kg**

38.5 kg

**Size (mm - H x W x D)**

413 x 479 x 489 mm

**Weight**

32 kg

**Noise Level, Idle**

14 dBA

**Noise Level (Print), Operating**

52 dBA

**Duplex Print Noise Level, Operating**

53 dBA

**Quiet Mode**

47 dBA

**ENERGY STAR**

Yes

**Average Power (Hibernate Mode)**

0.1 watts

**Average Power (Sleep Mode)**

1 watts

**Average Power (Ready Mode)**

57 watts

**Average Power (Printing)**

610 watts

**Average Power while Printing Duplex**

510 watts

**ENERGY STAR Typical Electricity****Consumption (TEC)**

0.53 kilowatt-hours per week

**Product Warranty**

1-Year Onsite Repair, Next Business Day

**Product Certifications**

ENERGY STAR, ICES-003 Class A, BSMI Class A, VCCI Class A, FCC Class A, NOM-032, UL, cUL, NOM, US FDA/CDRH, IEC 60825-1, CB Report, ISO-532B, CE (EU) DoC, EFTA (CE), KC logo, CCC, C-tick DoC, EuP, CECP, CEL, EC 1275/2008, ECMA-370, TED, SII, TER, SABS, UL-AR, GS Mark, Green Dot, ISO-9296, COC, CCD-035 EcoLogo, Green Mark, EPEAT, China Green Product (CGP)

**Maximum Monthly Duty Cycle**

Up to 120000 pages per month<sup>3</sup>

**Recommended Monthly Page Volume**

1500 - 15000 pages<sup>2</sup>

**Specified Operating Environment**

Humidity: 15 to 80% Relative Humidity, Temperature: 10 to 32°C (50 to 90°F), Altitude: 0 - 2896 metres

**License/Agreement Terms**

Printers are sold subject to certain license/agreement conditions. See [www.lexmark.com/printerlicense](http://www.lexmark.com/printerlicense) for details.

**Country of Origin**

China (PRC), Mexico

**UNSPSC Code**

43212110


<sup>1</sup>This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (<http://www.openssl.org/>)

<sup>2</sup>"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage.

<sup>3</sup>"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs.

<sup>4</sup>Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity.

<sup>5</sup>Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: [www.lexmark.com/ISOspeeds](http://www.lexmark.com/ISOspeeds).

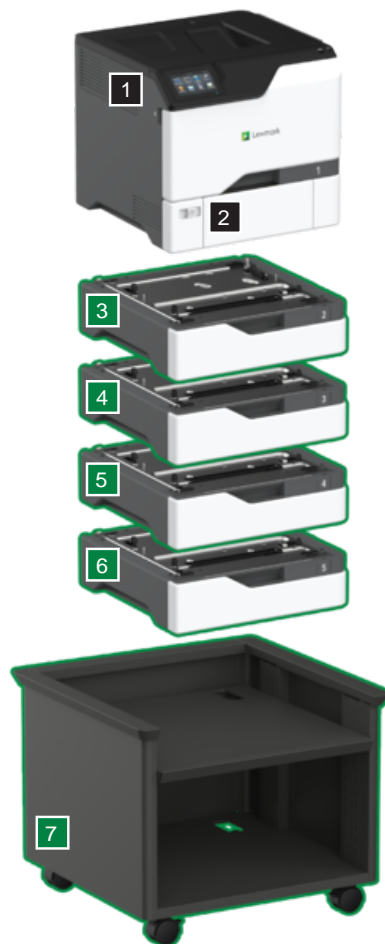

Callout	Availability	Description
1	Standard	4.3-inch (10.9-cm) Touch Screen
2	Standard	550-Sheet Input and 100-Sheet Multipurpose Feeder
3	Optional	550-Sheet Input
4	Optional	300-Sheet Output Bin
5	Optional	100-Sheet Multipurpose Feeder
6	Optional	Adjustable Stand
7	Optional	Adjustable Stand

P/N	Toner Cartridges	P/N	Extended Warranties
71C0Z10	Lexmark CS/CX730, 735, C/XC4342, C/XC4352 Black 150K Imaging Unit	2372750	CS730 2-Year Renewal Onsite Repair, Response Time Next Business Day
71C0Z50	Lexmark CS/CX730, 735, C/XC4342, C/XC4352 Colour (CMY) 150K Imaging Unit	2372751	CS730 3-Year Renewal Onsite Repair, Response Time Next Business Day
71C0W00	Lexmark CS/CX730, 735, C/XC4342, C4352 170K Waste Container	2372752	CS730 4-Year Renewal Onsite Repair, Response Time Next Business Day
71C0H20	Lexmark CS/CX730 Cyan 10.5K Toner Cartridge		
71C0H30	Lexmark CS/CX730 Magenta 10.5K Toner Cartridge	2372753	CS730 1-Year Post Warranty Onsite Repair Next Business Day
71C0H40	Lexmark CS/CX730 Yellow 10.5K Toner Cartridge	2372754	CS730 Per Call Onsite Repair Next Business Day Warranty
71C0H10	Lexmark CS730, 735, CX730 Black 22K Toner Cartridge		
71C80C0	Lexmark CS/CX730, 735 Cyan Return Programme 5K Toner Cartridge		
71C80M0	Lexmark CS/CX730, 735 Magenta Return Programme 5K Toner Cartridge		
71C80Y0	Lexmark CS/CX730, 735 Yellow Return Programme 5K Toner Cartridge		
71C80K0	Lexmark CS/CX730, 735 Black Return Programme 5K Toner Cartridge		
71C8HC0	Lexmark CS/CX730 Cyan Return Programme 10.5K Toner Cartridge		
71C8HM0	Lexmark CS/CX730 Magenta Return Programme 10.5K Toner Cartridge		
71C8HY0	Lexmark CS/CX730 Yellow Return Programme 10.5K Toner Cartridge		
71C8HK0	Lexmark CS730, 735, CX730 Black Return Programme 22K Toner Cartridge		
P/N	Paper Handling		
40C2100	550-Sheet Tray		
P/N	Furniture		
40C2300	Adjustable Stand		
P/N	Memory Options		
27X0400	500+ GB Hard Disk		
57X9528	Intelligent Storage Drive (ISD)		
P/N	Application Solutions		
57X0300	Contact Authentication Device		
57X0301	Contactless Authentication Device		
82S1204	Bar Code License		
82S1203	IPDS License		
P/N	Connectivity		
27X6410	Lexmark MarkNet N8372 802.11 a/b/g/n/ac Wireless Print Server		
27X0823	MarkNet N8370 Wireless for CS720, CS725, CX725		
1021294	USB (2 Meter) Cable		
SPD0002	Surge Protective Device, 220-240V		
P/N	Extended Warranties		
2372741	CS730 1-Year Base Warranty Onsite Repair NBD Warranty		
2372743	CS730 1-Year Onsite Repair NBD Warranty		
2372744	CS730 2-Year Onsite Repair NBD Warranty		
2372745	CS730 3-Year Onsite Repair NBD Warranty		
2372746	CS730 4-Year Onsite Repair NBD Warranty		
2372747	CS730 5-Year Onsite Repair NBD Warranty		
2372748	CS730 6-Year Onsite Repair NBD Warranty		
2372749	CS730 1-Year Renewal Onsite Repair, Response Time Next Business Day		