



Lexmark CS531dw

Exceptional performance, secure and sustainable



Lexmark CS531dw

With exceptional performance and secure design, the CS531dw printer delivers enhanced productivity up to 33 ppm* on A4 paper and toner yields up to 15,800 pages mono**, and up to 8,800 pages colour**. Engineered for long life with environmental certifications and advanced power management, this efficient model has high sustainability. Fast time to first print, superior print quality and easy-to-use touch screen.

Secure by design

Lexmark expertise helps customers protect their data, their device and their network. Our security ecosystem is designed to overcome the most complex data challenges. And now we've added the Trusted Platform Module (TPM)***, which includes on-board authentication, system integrity checks, and cryptographic capabilities to create a unique digital system fingerprint. TPM meets stringent industry and US government security standards including Common Criteria and Federal Information Processing Standard (FIPS).

Proprietary technology

We own core technology across hardware, firmware, services, and solutions, creating seamless connections designed to reduce the risk of security gaps between your document, your device and your network. Our expertise is our customer's benefit.

Sustainability

With certifications in Energy Star®, Blue Angel, RoHS, EPEAT® Silver. Models are sustainable for today and beyond. Lexmark is an industry leader of recycled content with products using at least 35% PCR content and continual focus on improvement. This line is also engineered for Long Life and designed to last and reduce waste.

Intelligent Design

Every touch point is designed to withstand high usage while meeting accessibility standards. Steel frames support the device and provide durability to help ensure consistent long-

term performance. Products are designed for long service life with long-life components and are easily serviced with few tools.



Manageability

These IoT-ready devices can be remotely managed, including setup, configuration, consumables management, and diagnostics. Wireless capability gives freedom of access and remote firmware updates make it easy to upgrade to the latest apps and security features. Our mobile printing app makes it easier to monitor and manage your print jobs from remote locations, all from the touch of your phone.

Ongoing professional product support


From easy installation through a lifetime of high volumes of pages, you'll find our devices easy to use and intuitive. From instructional and on-product support videos to simple colour-coded guidance for maintenance tasks like changing toner, make our device experience world-class. For our managed print customers, we offer a step beyond with predictive analytics for fleet diagnostics that can help Lexmark detect and prevent potential problems before they happen.

* Print speeds measured in accordance with ISO/IEC 24734 (ESAT). For more information see: www.lexmark.com/ISOspeeds.

** Average continuous black or continuous composite colour (CMY) declared yield in one-sided (simplex) mode up to this number of pages in accordance with ISO/IEC 19798. Actual yield will vary considerably based upon many factors. See www.lexmark.com/yields for more information. In demonstration of circular economy principles, genuine Lexmark supplies with Unison™ Toner may contain components recovered from the Lexmark Cartridge Collection Programme (LCCP).

*** The Trusted Platform Module (TPM) is not available in some countries.

Lexmark CS531dw

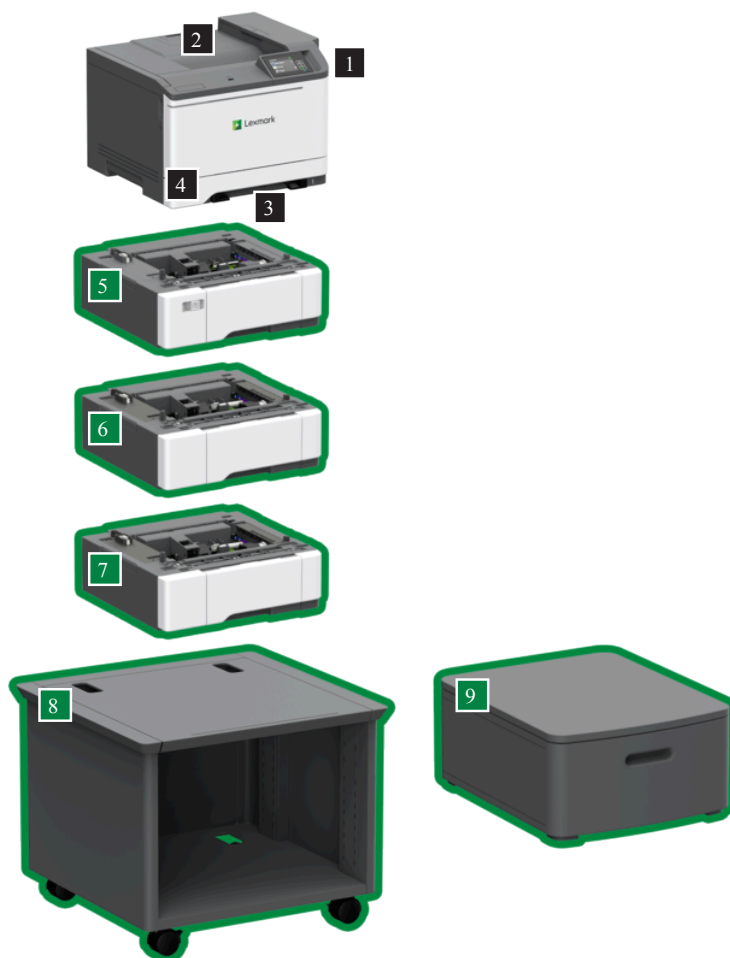

- 1 **Printer with 7.2 cm touch screen**
318.30 x 455 x 422.50 mm
- 2 **170-Sheet output bin**
Dimensions included as part of base model
- 3 **Single sheet multipurpose feeder**
Dimensions included as part of base model
- 4 **250-Sheet tray**
Dimensions included as part of base model
- 5 **650-Sheet Duo Tray**
132.1 x 424.2 x 416.6 mm
- 6 **550-Sheet Tray**
132.1 x 424.2 x 416.6 mm

- 7 **550-Sheet Tray**
132.1 x 424.2 x 416.6 mm
- 8 **Adjustable Stand**
521 x 653 x 625 mm
- 9 **Swivel Cabinet**
263 x 476 x 600 mm

- Standard
- Optional

P/N	Hardware
50M0030	Lexmark CS531dw
P/N	Supplies
75M0H10	Lexmark CS531, CX532 Black 15.8K Toner Cartridge
75M0H20	Lexmark CS531, CX532 Cyan 8.8K Toner Cartridge
75M0H30	Lexmark CS531, CX532 Magenta 8.8K Toner Cartridge
75M0H40	Lexmark CS531, CX532 Yellow 8.8K Toner Cartridge
75M0W00	Lexmark CS531, 632, 639, CX532, 635, C2335, XC2335 30K Waste Toner Bottle
75M0Z10	Lexmark CS531, 632, 639, CX532, 635 Black 150K Imaging Kit
75M0Z50	Lexmark CS531, 632, 639, CX532, 635 4-Colour 150K Imaging Kit
75M0ZK0	Lexmark CS531, 632, 639, CX532, 635, C2335, XC2335 Black Return Programme 150K Imaging Kit
75M0ZV0	Lexmark CS531, 632, 639, CX532, 635, C2335, XC2335 4-Colour Return Programme 150K Imaging Kit
75M20C0	Lexmark CS531, 632, CX532, 635 Cyan Return Programme 2K Toner Cartridge
75M20K0	Lexmark CS531, 632, CX532, 635 Black Return Programme 3K Toner Cartridge
75M20M0	Lexmark CS531, 632, CX532, 635 Magenta Return Programme 2K Toner Cartridge
75M20Y0	Lexmark CS531, 632, CX532, 635 Yellow Return Programme 2K Toner Cartridge
75M2HC0	Lexmark CS531, CX532 Cyan Return Programme 8.8K Toner Cartridge
75M2HK0	Lexmark CS531, CX532 Black Return Programme 15.8K Toner Cartridge
75M2HM0	Lexmark CS531, CX532 Magenta Return Programme 8.8K Toner Cartridge
75M2HY0	Lexmark CS531, CX532 Yellow Return Programme 8.8K Toner Cartridge
P/N	Paper Handling
50M7550	550-Sheet Tray
50M7650	650-Sheet Duo Tray
P/N	Memory Options
57X9528	Intelligent Storage Device (ISD)
P/N	Application Solutions
57X0300	Contact Authentication Device
57X0301	Contactless Authentication Device
82S1203	IPDS License
82S1204	Bar Code License
P/N	Connectivity
1021294	USB (2 Meter) Cable
SPD0002	Surge Protective Device, 220-240V
P/N	Furniture
3073173	Swivel Cabinet
40C2300	Adjustable Stand

Product Specifications		Lexmark CS531dw
Printing		
Display	2.8 inch (7.2 cm) Colour touch screen	
Print Speed	Up to: Black: 33 ppm ¹ (A4) / Colour: 33 ppm ¹ (A4)	
Time to First Page	As fast as: Black: 7.1 seconds / Colour: 7.6 seconds	
Print Resolution	Black: 1200 x 1200 dpi, 4800 Color Quality / Colour: 4800 Color Quality, 1200 x 1200 dpi	
Memory	Standard: 1024 MB / Maximum: 1024 MB	
Hard Disk	Intelligent Storage Drive (optional); Magnetic Hard Disk (optional)	
Recommended Monthly Page Volume	1,500 - 10,000 pages ²	
Maximum Monthly Duty Cycle	Up to: 100,000 pages per month ³	
Supplies ⁴		
Laser Cartridge Yields	up to: 15,800 ⁵ -page Black Cartridge / up to: 8,800 ⁵ -page Colour (CMY) Cartridges	
Cartridge(s) Shipping with Product	3,000 ⁵ -page Black Return Programme Toner Cartridge ⁵ , 2,000 ⁵ -page Colour (CMY) Return Programme Toner Cartridges ⁵	
Paper Handling		
Included Paper Handling	170-Sheet Output Bin, Integrated Duplex, Single sheet multipurpose feeder, 250-Sheet Tray	
Optional Paper Handling	650-Sheet Duo Tray, 550-Sheet Tray	
Paper Input Capacity	Up to: Standard: 251 pages 75 gsm bond / Maximum: 2001 pages 75 gsm bond	
Paper Output Capacity	Up to: Standard: 170 pages 75 gsm bond / Maximum: 170 pages 75 gsm bond	
Media Types Supported	Vinyl Labels, Paper Labels, Card Stock, Plain Paper, Envelopes, Refer to the Card Stock & Label Guide.	
Media Sizes Supported	A6, Oficio, 7 3/4 Envelope, 9 Envelope, JIS-B5, A4, Legal, A5, Hagaki Card, Letter, B5 Envelope, Statement, C5 Envelope, Executive, Universal, DL Envelope, Folio, 10 Envelope	
General Information ⁶		
Standard Connectivity	Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear USB 2.0 Specification Hi-Speed Certified port (Type A), 802.11a/b/g/n/ac + Apple iBeacon, USB 2.0 Specification Hi-Speed Certified (Type B)	
Noise Level	Operating: 51 dBA (Print)	
Specified Operating Environment	Altitude: 0 - 2900 Metres (9,500 Feet) / Humidity: 15 to 80% Relative Humidity / Temperature: 10 to 32.2°C (50 to 90°F)	
Product Guarantee	1-Year Onsite Service, Next Business Day	
Size / Weight	H x W x D: 318.30 x 455 x 422.50 mm / 20.55 kg	
ENERGY STAR Typical Electricity Consumption	TEC: 0.46 kilowatt-hours per week	

All information is subject to change without notice. Lexmark is not liable for any errors or omissions.

¹ Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds.

² "Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³ "Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴ Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. ⁵ Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798. ⁶ Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/printerlicense for details.

© 2023 Lexmark. All rights reserved.

Lexmark, the Lexmark logo and Unison are trademarks of Lexmark International, Inc., registered in the United States and/or other countries.

Apple and AirPrint are trademarks of Apple Inc., registered in the U.S. and other countries. MOPRIA®, the Mopria® Logo™ and the Mopria® Alliance logos are registered trademarks and service marks of Mopria Alliance, Inc. in the United States and other countries. Unauthorised use is strictly prohibited. ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the U.S. Environmental Protection Agency. EPEAT® is a trademark of the Green Electronics Council in the United States and other countries. All other trademarks are the property of their respective owners.

This product includes software developed by the OpenSSL Project for use in the Open SSL Toolkit (<http://www.openssl.org/>).

