



 Lexmark™

Lexmark MX532adwe

Exceptional performance, secure and sustainable



Unison
TONER

Lexmark MX532adwe

With exceptional performance and secure design MX532adwe multi-function printer (copy/scan/print/fax) delivers enhanced productivity, up to 46/44 ppm* on letter/A4 paper and a toner yield up to 28,400 pages**. Fast time to first print, superior print quality and easy-to-use touch screen.

Secure by design

Lexmark expertise helps customers protect their data, their device and their network. Our security ecosystem is designed to overcome the most complex data challenges. And now we've added the Trusted Platform Module (TPM)***, which includes on-board authentication, system integrity checks, and cryptographic capabilities to create a unique digital system fingerprint. TPM meets stringent industry and US government security standards including Common Criteria and Federal Information Processing Standard (FIPS).

Proprietary technology

We own core technology across hardware, firmware, services, and solutions, creating seamless connections designed to reduce the risk of security gaps between your document, your device and your network. Our expertise is our customer's benefit.

Sustainability

With certifications in Energy Star®, Blue Angel, RoHS, EPEAT® Silver. Models are sustainable for today and beyond. Lexmark is an industry leader of recycled content with products using at least 39% PCR content and continual focus on improvement. This line is also engineered for Long Life and designed to last and reduce waste.

Intelligent Design

Every touch point is designed to withstand high usage while meeting accessibility standards. Steel frames support the device and provide durability to help ensure consistent long-term performance. Products are designed for long service life with long-life components and are easily serviced with few tools.



Optimized productivity

Increase productivity with optimized performance. Print at up to 46/44 pages per minute* (letter/A4) and capture information quickly with scan speeds of up to 52/49 images per minute (letter/A4) for one-sided scanning, and up to 104/98 images per minute (letter/A4) for two-sided scanning.

Manageability

These IoT-ready devices can be remotely managed, including setup, configuration, consumables management, and diagnostics. Wireless capability gives freedom of access and remote firmware updates make it easy to upgrade to the latest apps and security features. Our mobile printing app makes it easier to monitor and manage your print jobs from remote locations, all from the touch of your phone.


This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

* Print speeds measured in accordance with ISO/IEC 24734 (ESAT). For more information see: www.lexmark.com/ISOspeeds.

** Average continuous mono declared yield in one-sided (simplex) mode up to this number of pages in accordance with ISO/IEC 19752. Actual yield will vary considerably based upon many factors. See www.lexmark.com/yields for more information. In demonstration of circular economy principles, genuine Lexmark supplies with Unison™ Toner may contain components recovered from the Lexmark Cartridge Collection Program (LCCP).

*** The Trusted Platform Module (TPM) is not available in some countries.

Lexmark MX532adwe

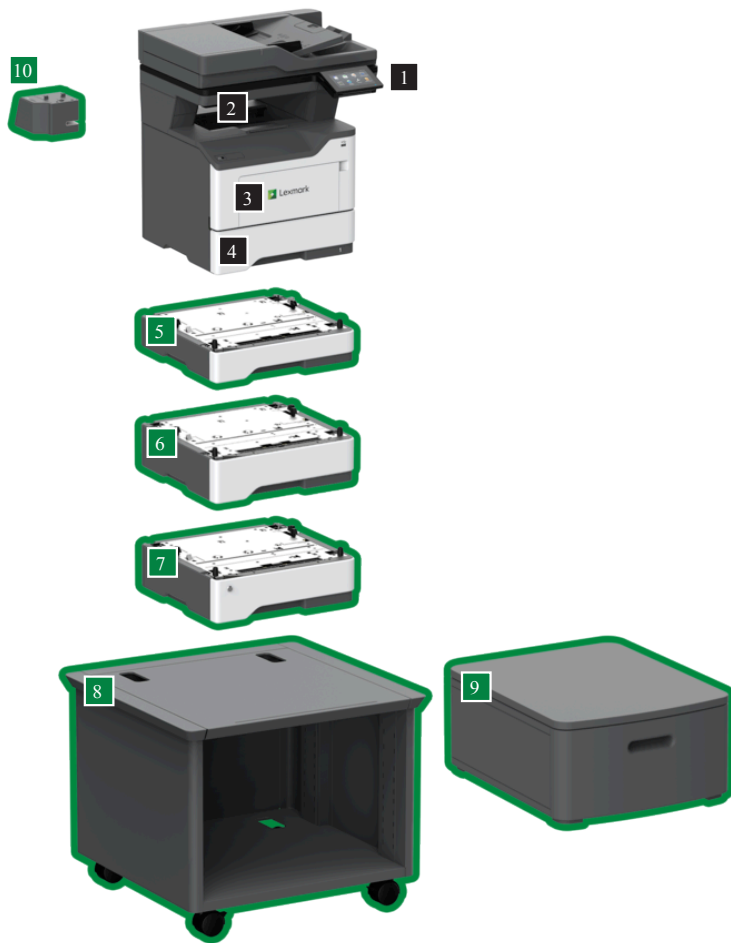

- 1 **Multifunction product with 4.3-inch (10.9 cm) touch screen**
513.7 x 479 x 450 mm
20.2 x 18.9 x 17.7 in.
- 2 **250-Sheet output bin**
Dimensions included as part of base model
- 3 **100-Sheet multipurpose feeder**
Dimensions included as part of base model
- 4 **550-Sheet tray**
Dimensions included as part of base model
- 5 **250-Sheet Tray**
78.1 x 389 x 373.7 mm
3.1 x 15.3 x 14.7 in.

- 6 **550-Sheet Tray**
108.2 x 389 x 373.7 mm
4.3 x 15.3 x 14.7 in.
- 7 **550-Sheet Lockable Tray**
108.2 x 389 x 373.7 mm
4.3 x 15.3 x 14.7 in.
- 8 **Adjustable Stand**
584 x 597 x 597 mm
23 x 23.5 x 23.5 in.
- 9 **Swivel Cabinet**
263 x 476 x 600 mm
10.4 x 18.7 x 23.6 in.

- Standard
- Optional

P/N 38S0820	Hardware Lexmark MX532adwe
P/N 66S0HA0	Supplies Lexmark MS531, MX532 28.4K Toner Cartridge
66S0Z00	Lexmark MS531, 631, 632, 639, MX532, 632, M/XM3350 Return Program 75K Imaging Unit
66S0ZA0	Lexmark MS531, 631, 632, 639, MX532, 632 75K Imaging Unit
66S4000	Lexmark MS531, 631, 632, MX532, 632 Return Program 5K Toner Cartridge
66S4H00	Lexmark MS531, MX532 Return Program 28.4K Toner Cartridge
P/N 38S2910 38S3110 38S3130	Paper Handling 250-Sheet Tray 550-Sheet Tray 550-Sheet Lockable Tray
P/N 27X0400 57X9528	Memory Options 500+ GB Hard Disk Intelligent Storage Device (ISD)
P/N 57X0225 57X0235 57X0300 57X0301 82S1203 82S1204	Application Solutions Desktop Contactless Reader Contactless Front Solutions Module (Primary) Contact Authentication Device Contactless Authentication Device IPDS License Bar Code License
P/N 1021294 57X7040 SPD0002	Connectivity USB (2 Meter) Cable English Keyboard Kit Surge Protective Device, 220-240V
P/N 3073173 35S8502	Furniture Swivel Cabinet Adjustable Stand

Product Specifications		Lexmark MX532adwe
Printing		
Display	Lexmark e-Task 4.3-inch (10.9 cm) color touch screen	
Print Speed	Up to: Black: 46 ppm ¹ (Letter)	
Time to First Page	As fast as: Black: 6 seconds	
Print Resolution	Black: 1200 x 1200 dpi, 1200 IQ (1200 x 600 dpi)	
Memory	Standard: 2048 MB / Maximum: 2048 MB	
Hard Disk	Intelligent Storage Drive available; Magnetic Hard Disk available	
Recommended Monthly Page Volume	2,000 - 15,000 pages ²	
Maximum Monthly Duty Cycle	Up to: 120,000 pages per month ³	
Copying		
Copy Speed	Up to: Black: 46 cpm ¹ (Letter)	
Time to First Copy	As fast as: Black: 6.5 seconds	
Scanning		
ADF Scan	DADF (single pass Duplex)	
A4/Ltr Duplex Scan Speed	Up to: Black: 98/104 sides per minute / Color: 68/72 sides per minute	
A4/Ltr Simplex Scan Speed	Up to: Black: 49/52 sides per minute / Color: 34/36 sides per minute	
ADF Paper Input Capacity	Up to: 100 pages 20 lb or 75 gsm bond	
Faxing		
Modem Speed	ITU T.30, V.34 Half-Duplex, 33.6 Kbps	
Supplies⁴		
Laser Cartridge Yields	up to: 28,400 ⁵ -page Black Cartridge	
Imaging Unit Estimated Yield	Up to: 75,000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage	
Cartridge(s) Shipping with Product	5,000 ⁵ -page Return Program Toner Cartridge ⁵	
Paper Handling		
Included Paper Handling	100-Sheet Multipurpose Feeder, 250-Sheet Output Bin, Integrated Duplex, 550-Sheet Input	
Optional Paper Handling	550-Sheet Lockable Tray, 250-Sheet Tray, 550-Sheet Tray	
Paper Input Capacity	Up to: Standard: 650 pages 20 lb or 75 gsm bond / Maximum: 2300 pages 20 lb or 75 gsm bond	
Paper Output Capacity	Up to: Standard: 250 pages 20 lb or 75 gsm bond / Maximum: 250 pages 20 lb or 75 gsm bond	
Media Types Supported	Paper Labels, Card Stock, Plain Paper, Envelopes, Refer to the Paper & Specialty Media Guide	
Media Sizes Supported	A6, Oficio, 7 3/4 Envelope, 9 Envelope, JIS-B5, A4, Legal, A5, Hagaki Card, Letter, B5 Envelope, Statement, C5 Envelope, Executive, DL Envelope, Folio, 10 Envelope	
General Information⁶		
Standard Ports	Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), USB 2.0 Specification Hi-Speed Certified (Type B), 802.11b/g/n/ac + BLE	
Optional Network Ports / Optional Local Ports	MarkNet N8230 Fiber Ethernet Print Server / Internal 1284-B Bidirectional Parallel, Internal RS-232C serial	
Noise Level	Operating: 55 dBA (Print) / 57 dBA (Copy) / 52 dBA (Scan)	
Specified Operating Environment	Temperature: 10 to 32°C (50 to 90°F) / Altitude: 0 - 2896 Meters (9,500 Feet) / Humidity: 15 to 80% Relative Humidity	
Product Warranty	1-Year Onsite Service, Next Business Day	
Size / Weight	H x W x D: 513.7 x 479 x 450 mm / 21.2 kg	
ENERGY STAR Typical Electricity Consumption	TEC: 0.58 kilowatt-hours per week	

All information is subject to change without notice. Lexmark is not liable for any errors or omissions.

¹ Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds.

² "Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³ "Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴ Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. ⁵ Average standard page yield value declared in accordance with ISO/IEC 19752. ⁶ Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/printerlicense for details.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

© 2023 Lexmark. All rights reserved.

Lexmark, the Lexmark logo and Unison are trademarks of Lexmark International, Inc., registered in the United States and/or other countries.

Apple and AirPrint are trademarks of Apple Inc., registered in the U.S. and other countries. MOPRIA®, the Mopria® Logo™ and the Mopria® Alliance logos are registered trademarks and service marks of Mopria Alliance, Inc. in the United States and other countries. Unauthorized use is strictly prohibited. ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the U.S. Environmental Protection Agency. EPEAT® is a trademark of the Green Electronics Council in the United States and other countries. All other trademarks are the property of their respective owners.

This product includes software developed by the OpenSSL Project for use in the Open SSL Toolkit (<http://www.openssl.org/>).

