



Lexmark CX931dse

Lexmark CX931dse 大幅面彩色多功能数码复合机专为安全性、可用性和可靠性而设计，速度高达每分钟 35 页，适用于大型工作组*。

部件号

32D0210

打印技术

彩色激光打印机

功能

彩色复印, 彩色打印, 彩色扫描, 彩色网络扫描, Trusted Platform Module (TPM), 可信平台模块 (TPM) 在某些国家/地区不可用。

工作组大小

大型工作组

触摸屏显示

是

显示屏

Lexmark e-Task 7 英寸 (17.8 厘米) 彩色触摸屏

打印速度 (Letter, 黑色)

多达 35 页/每分钟⁴

打印速度 (Letter, 彩色)

多达 35 页/每分钟⁴

双面打印速度 (Letter, 黑色)

多达 35 spm⁴

双面打印速度 (Letter, 彩色)

多达 35 spm⁴

打印速度 (A4, 黑色)

多达 35 页/每分钟⁴

打印速度 (A4, 彩色)

多达 35 页/每分钟⁴

双面打印速度 (A4, 黑色)

多达 35 spm⁴

双面打印速度 (A4, 彩色)

多达 35 spm⁴

首页打印时间 (黑色) 高达速度为 7.2 秒

首页打印时间 (彩色) 高达速度为 6.2 秒

双面打印

集成双面打印

打印分辨率, 黑色

1200 x 1200 dpi, 2400 图像质量

打印分辨率, 彩色

1200 x 1200 dpi, 2400 图像质量

复印速度 (Letter, 黑色)

多达 35 每分钟复印页数⁴

复印速度 (Letter, 彩色)

多达 35 每分钟复印页数⁴

双面复印速度 (Letter, 黑色)

多达 35 spm⁴

双面复印速度 (Letter, 彩色)

多达 35 spm⁴

复印速度 (A4, 黑色)

多达 35 每分钟复印页数⁴

复印速度 (A4, 彩色)

多达 35 每分钟复印页数⁴

双面复印速度 (A4, 黑色)

多达 35 spm⁴

双面复印速度 (A4, 彩色)

多达 35 spm⁴

首页复印输出时间 (黑色), 最快速度为 9.1 秒

首页复印输出时间 (彩色), 最快速度为 8 秒

缩/放范围

25 - 400 %

A4/Letter幅面 单面扫描速度 (黑色): 多达 55/55 页/每分钟

A4/Letter幅面 单面扫描速度 (彩色): 多达 55/55 页/每分钟

A4/Letter幅面 双面扫描速度 (黑色): 多达 27.5/27.5 页/每分钟

A4/Letter幅面 双面扫描速度 (彩色): 多达 27.5/27.5 页/每分钟

扫描区域, 最大 (毫米)

297 x 432 毫米

输稿器类型

回转型双面自动输稿器

扫描仪类型

Flatbed scanner with automatic document feeder

扫描分辨率, 增强

Up to 600 x 600 dpi

扫描分辨率, 光学

Up to 600 dpi

扫描文件格式 (发送为)

JPEG, JPG, PDF, 安全的PDF, TIFF, 档案 PDF (A-1a, A-1b), 可搜索的PDF

Scan Destinations

e-mail, FTP, USB闪存盘, USB或网络连接的计算机

处理器速度

Quad Core 1.2 GHz

内存, 标准

4096 MB

内存, 最大

4096 MB

硬盘

包括智能存储驱动器; 磁性硬盘 (可选)

支持Apple 操作系统

Support is provided through AirPrint and AirScan only

Citrix MetaFrame

Microsoft Windows Server 2003 and 2003 X64 Edition with Citrix XenApp 5.0, Microsoft Windows Server 2008 and 2008 X64 Edition with Citrix XenApp 5.0, Microsoft Windows Server 2012 R2 Datacenter Edition running Citrix XenApp 7.5, 6, 7, 8, 9, 11, 12, 13, 14, 15, 16, Microsoft Windows Server 2012 Datacenter Edition running Citrix XenApp 7.5, 6, 7, 8, 9, 11, 12, 13, 14, 15, 16, Microsoft Windows Server 2012 Foundation running Citrix XenApp 6.0, 6.5, Microsoft Windows Server 2012 Essentials running Citrix XenApp 6.0, 6.5, Microsoft Windows Server 2012 Standard running Citrix XenApp 6.0, 6.5, Microsoft Windows Server 2008 R2 Datacenter Edition running Citrix XenApp 7.5, 6, 7, 8, 9, 11, 12, 13, 14, 15, 16, Microsoft Windows Server 2008 R2 Enterprise Edition running Citrix XenApp 6.0, 6.5, Microsoft Windows Server 2008 R2 Standard Edition running Citrix XenApp 6.0, 6.5

支持Linux 操作系统

openSUSE Linux 42.3, Fedora 27, 28, 29, Ubuntu 16.04, 18.04 LTS, Debian GNU/Linux 8.11, openSUSE Linux 15, Debian 9.4, Debian GNU/Linux 9.5, Debian GNU/Linux 9.6, Red Hat Linux 7.5, 7.6

支持Microsoft Windows 操作系统

Windows 2000, Windows NT (4.00/4.00 Server), Windows Me, Windows XP, Windows Server 2003, Windows 98 2nd Edition, Windows XP x64, Windows Server 2003 running Terminal Services, 运行终端服务的 Microsoft Windows 2000 Server, Windows Server 2003 x64, Windows Server 2003 x64 running Terminal Services, Windows Vista, Windows Vista x64, Windows Server 2008, Windows Server 2008 x64, Windows Server 2008 running Terminal Services, Windows Server 2008 x64 running Terminal Services, Windows 7, Windows 7 x64, Windows Server 2008 R2, Windows Server 2008 R2 running Terminal Services, Windows 8, Windows 8 x64, Windows Server 2012, Windows 8.1, Windows 8.1 x64, Windows Server 2012 R2, Windows RT, Windows 10, Windows Server 2016, Windows Server 2019, Windows Server 2022, Windows 11

支持Novell 操作系统

Novell NetWare 6.5 Open Enterprise Server, Novell Open Enterprise Server 2 (SP3) on SuSE Linux Enterprise Server 10 SP4 (x86 and x64) 3, Novell Open Enterprise Server 11 (SP3) on SuSE Linux Enterprise Server 11 SP4 (x86 and x64), Novell Open Enterprise Server 11 (SP3) on SuSE Linux Enterprise Server 12 SP1 (x86 and x64), Novell Open Enterprise Server 15 (SP1) on SuSE Linux Enterprise Server 11 SP4 (x86 and x64)

标配纸张处理

100 页多功能进纸器, 520页进纸盒, 400-Sheet Output Bin

纸张处理选项

装订、打孔完成器, 装订分页器, 520页进纸盒, 带脚轮机柜的520页进纸盒, 带脚轮的3x520页进纸盒, 信封进纸盒, 2000页进纸盒, 双接纸架, 带脚轮的2520页串联进纸盒, 工作台

进纸容量, 标准配置: 多达
多达 620 页

进纸容量, 最大: 多达
多达 5140 页

纸张输出容量, 标准配置: 多达
多达 400 页

纸张输出容量, 最大: 多达
多达 2000 页

支持纸张重量范围-标准进纸匣(gsm)
60 - 256 gsm

支持纸张重量范围-多功能进纸器 (gsm)
60 - 216 gsm

A3

Yes

ADF

110 页自动文档传送器

自动进稿器进纸容量: 多达
多达 110 页

自动进稿器纸张输出容量: 多达
多达 110 页

装订选项
是

装订功能
偏移堆叠, 装订, 打孔

进纸器数量
2

进纸器数量, 最大
6

支持的介质类型

卡片纸, 信封, 光面纸, 标签, 普通纸张, 请参考
纸张和特殊介质指南

支持的介质尺寸

10个信封, 7 3/4信封, 9信封, A3, A4, A5, B5 信封, C4 信封, C5 信封, DL信封, Hagaki 卡片, 行政人员, 开本, JIS-B4, JIS-B5, 帐簿纸, 法律, 信, 声明, Oficio, A6

标准端口

USB 2.0 规格高速认证 (B 型), 千兆以太网 (10/100/1000), 前置 USB 2.0 规格高速认证端口 (A 型), 后部 USB 2.0 规格高速验证端口 (类型 A)

可选的网络接口

Marknet N8372 WiFi 选项

直接 USB

是

以太网

是

支持的网络协议

TCP, UDP, IPSEC w/ IPv4, IPSEC w/ IPv6, ICMP, IGMP, IPv4, IPv6

网络打印方法

增强型IP (端口9400), IPP 1.0, 1.1, 2.0 (Internet Printing Protocol), Microsoft Web Services WSD, 拉印

网络管理协议

WINS, APIPA (AutoIP), DHCP, DNS, DDNS, mDNS, ARP, BOOTP

网络安全性

SNMPv3, 802.1x身份验证: MD5, MSCHAPv2, LEAP, PEAP, TLS, TTLS, 证书管理, SSL Cipher Configuration, TCP/UDP Port Access Control, Security Port Lockdown, TCP Restricted Server List, IPSEC Support (IPv4/IPv6)

可打印区域 (公制)

4.2 顶部、底部、右侧和左侧的内部页边距 (以毫米为单位)

打印机语言 (标准)

PCL 6仿真, 个人打印机数据流 (PPDS), PostScript 3仿真, 直接图像, PDF 1.7仿真, PCL 5, PCLm

字体和符号集

158种可缩放的PostScript字体, 39种可扩展的PPDS字体, 5个PPDS位图字体, 有关更多信息, 请参阅技术参考。 , 89 种可缩放 PCL 5/6 字体, 2 种 PCL 5/6 位图字体

市售耗材(最多)³

, 28,000 页黑色硒鼓粉盒, 16,500 页彩色 (CMY) 硒鼓粉盒

感光鼓估算打印量, 黑色: 可达
多达 87,000 页数, 基于每个打印作业平均 5 页 letter/A4 尺寸的页面

感光鼓估算打印量, CMY: 可达
多达 87,000 页数, 基于每个打印作业平均 5 页 letter/A4 尺寸的页面

随机耗材

5,000-page Black and Color (CMYK) Toner Cartridges

注意事项

产品只有使用专为在特定的地理区域内使用而设计的市售碳粉盒才能运行。请查看 www.lexmark.com/regions 以获取更多详细信息。

包装尺寸 (毫米 - 高 x 宽 x 长)
1009 x 764 x 811 毫米

包装重量 (公斤)
81.7 公斤

尺寸 (毫米 - 高 x 宽 x 长)
767.9 x 590 x 699.3 毫米

重量

63.2 公斤

噪声级别, 空闲时
15 分贝

打印噪声级别, 工作时
50 分贝

双面打印噪音级别, 工作时
50 分贝

复印噪声级, 运作
55 分贝

噪声水平(扫描), 操作时
55 分贝

能源之星
是

“休眠模式”的平均功率
0.1 瓦

“睡眠模式”的平均功率
1.2 瓦

平均功耗 (待机模式)
93 瓦

打印时的平均功率
477 瓦

能源之星 **Typical Electricity Consumption (TEC)**

0.53 kilowatt-hours per week

产品保修

1-Year Onsite Repair, Next Business Day

产品证书

ENERGY STAR, ICES-003 Class A, BSMI Class A, VCCI Class A, FCC Class A, NOM-032, UL, cUL, NOM, US FDA/CDRH, IEC 60825-1, CB Report, ISO-532B, CE (EU) DoC, EFTA (CE), KC logo, CCC, C-tick DoC, EuP, CECp, CEL, EC 1275/2008, ECMA-370, TED, SII, TER, SABS, UL-AR, GS Mark, Green Dot, ISO-9296, COC, CCD-035 EcoLogo, Green Mark, EPEAT, China Green Product (CGP), Mopria Certified

最大月打印负荷: 最多

多达 150 000 页/月²

推荐的每月页容量

4000 - 20000 页¹

指定操作环境

湿度: 8 至 80% 相对湿度, 海拔高度: 0 - 2500 米 (8,200 英尺), 温度: 10 - 32°C

原产地

North America & TAA Compliant - Mexico, Rest of World - Vietnam

UNSPSC代码

43212110

Harmonized Tariff Code


8443.31.0000

¹“推荐的每月打印页数”是根据客户准备每个月在设备上打印的平均页数帮助客户评估 Lexmark 的产品供应的页数范围。Lexmark 公司建议, 客户的每页打印页数应处于设备的推荐范围之内, 以获得最佳性能。此外还应考虑的其他因素包括: 耗材更换间隔、纸张装入间隔、打印速度及客户的典型应用。

²“最大月打印负荷”是某台设备在一个月时间内长时间运行可以输出的纸张页数。这项指标可以用于与其他利盟打印机或者多功能一体机的耐用性进行比较。

³依据ISO/IEC 19798, 黑色碳粉盒或组合CMY碳粉盒连续打印时的平均标定打印量最高为 # 张标准页。

⁴打印和复印速度分别按照 ISO/IEC 24734 和 ISO/IEC 24735 进行测量 (ESAT)。如需更多信息, 请查看 www.lexmark.com/ISOspeeds。

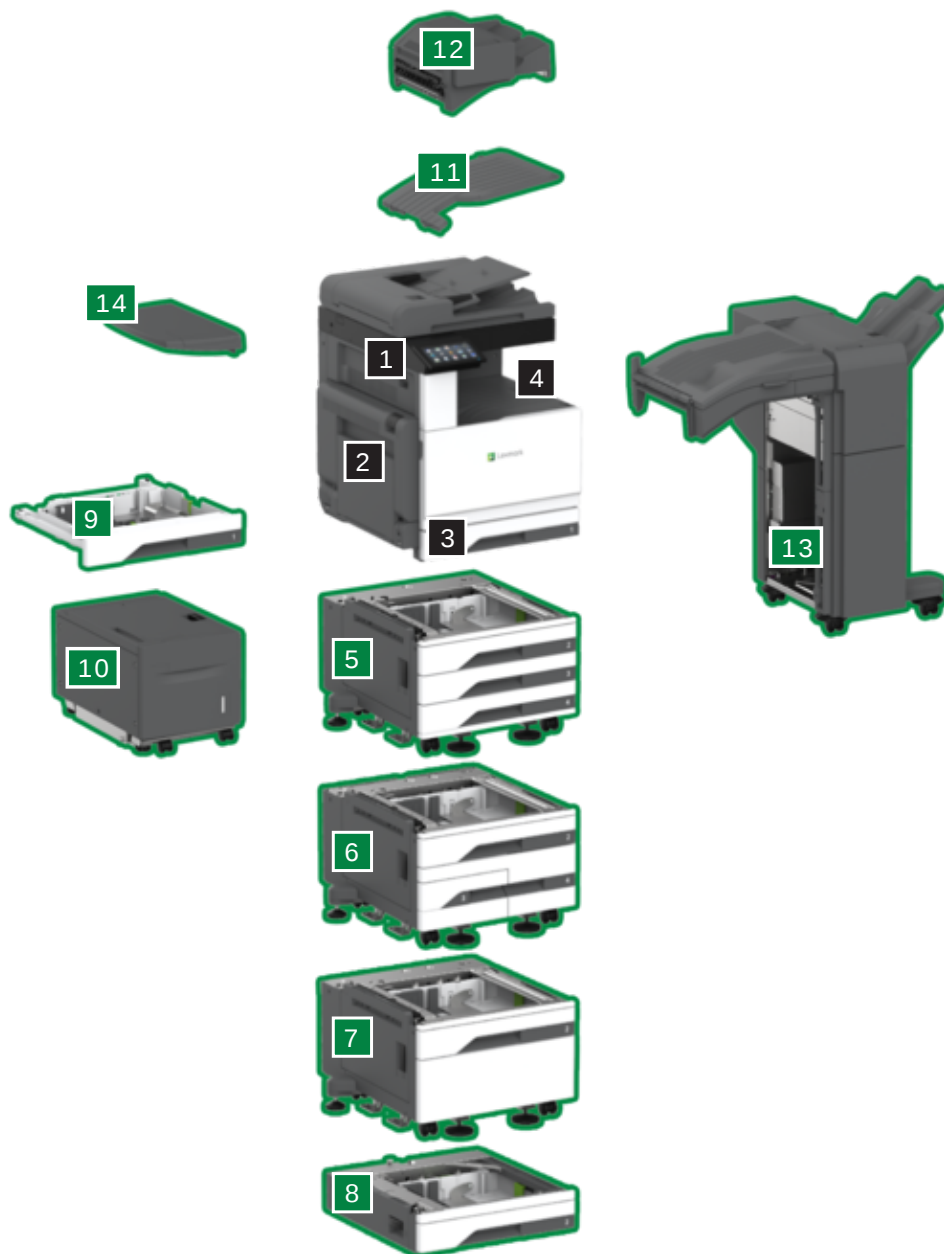

Callout	Availability	Description
1	标准	7 英寸 (17.8 厘米) 触摸屏
10	可选	2,000-Sheet Tray (sidecar)
11	可选	Dual Catch Bin
12	可选	装订分页器
13	可选	装订、打孔完成器
14	可选	Work Table
2	标准	100 页多功能进纸器
3	标准	
4	标准	400-Sheet Output Bin
5	可选	3 x 520-Sheet Tray with casters
6	可选	2,520-Sheet Tandem Tray with casters
7	可选	520-Sheet Tray with Caster Cabinet
8	可选	520-Sheet Tray
9	可选	Envelope Tray

P/N	碳粉盒	P/N	延长保修期
85D00C0	Lexmark CX930, 931 Cyan 5K Toner Cartridge	2373329	CX931 4-Year Renewal Onsite Repair, Response Time Next Business Day
85D00M0	Lexmark CX930, 931 Magenta 5K Toner Cartridge	2373330	CX931 1-Year Post Wty OSR NBD Extended Warranty
85D00Y0	Lexmark CX930, 931 Yellow 5K Toner Cartridge	2373347	CX931 3-Year Parts Only Extended Warranty
85D00K0	Lexmark CX930, 931 Black 5K Toner Cartridge	2373348	CX931 4-Year Parts Only Extended Warranty
85D0HC0	Lexmark CX930, 931 Cyan 16.5K Toner Cartridge	2373349	CX931 5-Year Parts Only Extended Warranty
85D0HM0	Lexmark CX930, 931 Magenta 16.5K Toner Cartridge	2373350	CX931 6-Year Parts Only Extended Warranty
85D0HY0	Lexmark CX930, 931 Yellow 16.5K Toner Cartridge	2373351	CX931 1-Year Renewal Parts Only
85D0HK0	Lexmark CX930, 931 Black 28K Toner Cartridge	2373352	CX931 2-Year Renewal Parts Only
85D0P00	Lexmark CX930, 931, XC9325, 9335 Black 87K Photoconductor	2373353	CX931 3-Year Renewal Parts Only
85D0Q00	Lexmark CX930, 931, XC9325, 9335 3-Pack 87K Photoconductor Kit	2373354	CX931 4-Year Renewal Parts Only
85D0W00	Lexmark CX930, 931, XC9325, 9335 40K Waste Container		
25A0013	15000页装订盒		
P/N	纸张处理		
32D0800	520-Sheet Tray		
32D0801	520-Sheet Tray with Caster Cabinet		
32D0802	3 x 520-Sheet Tray with Casters		
32D0803	2,520-Sheet Tandem Tray with Casters		
32D0804	Envelope Tray		
32D0816	2,000-Sheet Tray (sidecar)		
32D0818	Dual Catch Bin		
32D0820	Inline Staple Finisher		
32D0821	Staple (2/3) Hole Punch Finisher		
32D0822	Staple (2/4) Hole Punch Finisher		
P/N	家具		
32D0808	CX93x/MX93x Work Table		
P/N	内存选件		
27X0400	500+ GB Hard Disk		
57X0070	Removable Hard Disk Enclosure Kit		
P/N	应用程序解决方案		
57X0300	Contact Authentication Device		
57X0301	Contactless Authentication Device		
82S1204	条形码许可证		
82S1203	IPDS许可证		
P/N	连通性		
27X6410	Lexmark MarkNet N8372 802.11 a/b/g/n/ac Wireless Print Server		
57X7040	English Keyboard Kit		
37X6350	Analog Fax Card		
1021294	2 米 USB 电缆 (RoHS)		
SPD0002	Surge Protective Device, 220-240V		
P/N	延长保修期		
2373320	CX931 1-Year Onsite Repair NBD Warranty		
2373321	CX931 2-Year Onsite Repair NBD Warranty		
2373322	CX931 3-Year Onsite Repair NBD Warranty		
2373323	CX931 4-Year Onsite Repair NBD Warranty		
2373324	CX931 5-Year Onsite Repair NBD Warranty		
2373325	CX931 6-Year Onsite Repair NBD Warranty		
2373327	CX931 2-Year Renewal Onsite Repair, Response Time Next Business Day		
2373328	CX931 3-Year Renewal Onsite Repair, Response Time Next Business Day		